



MOLDMAKER | PLASTIC INJECTION



Products Catalogue
Cable Carriers



MOLDMAKER | PLASTIC INJECTION

Tespo was founded in 2005 and it has started its activities providing service solutions for plastic injection, reaching several different market segments: automotive, electronic, food sector, accessories and plastic components in general. Due to the credibility and trust acquired through the years based in solid partnerships with its customers and providers, Tespo has moved forward and has developed its range of products. Nowadays, besides the plastic injection services, the company produces plastic injection moulds, as well as cable carriers and slides for cargo and passengers lifts.



OWN PRODUCTION

Manufacturer of cable carriers and slides for lifts.



ASSEMBLED CABLE CARRIERS

The cable carriers are delivered ready, reducing your time to assemble them.



EASY TO USE

Opening system that facilitates changes and maintenances of the cables and hoses.

www.tespoinjetados.com.br

Access our website and see:



**How to Assemble
The Cable Carrier**



**How to Define
The Cable Carrier**



**Our Products
Range**

Cable Carrier T10.10

Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;


Links with fixed crossbars;

Available in 3 radius.




Mounting Brackets

Each cable carrier needs one set of mounting brackets made by two brackets. Each bracket should be fixed in each end of the cable carrier.

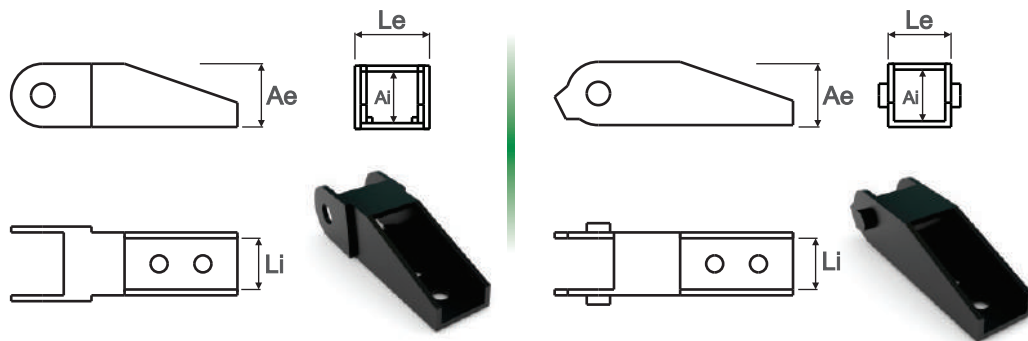


CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03155	MOUNTING BRACKETS SET T10.10	10,6X10,6	15X13

Technical Specifications

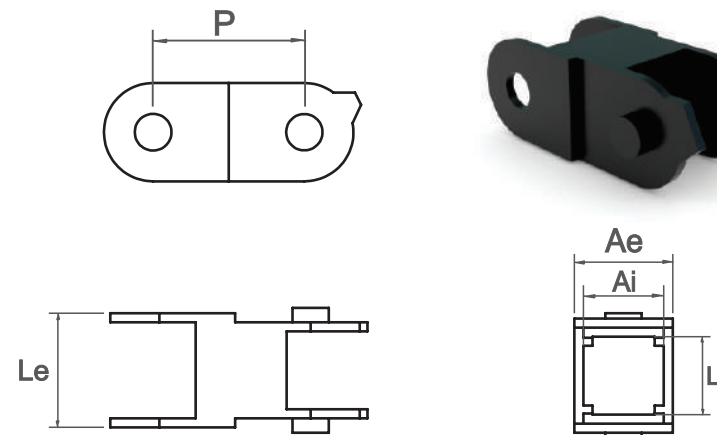

Radius

18
28
38

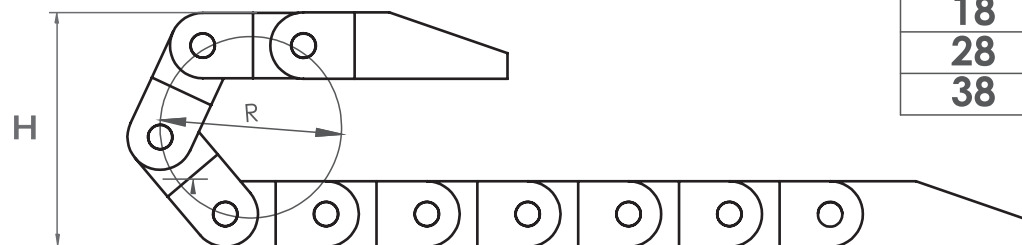

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/METRO	WEIGHT/METRO
03154	CABLE CARRIER T10.10.R18mm	10,6X10,6	15X13	46	18	20	49	107gr
03181	CABLE CARRIER T10.10.R28mm	10,6X10,6	15X13	70	28	20	49	107gr
03182	CABLE CARRIER T10.10.R38mm	10,6X10,6	15X13	87	38	20	49	107gr


*Unit of measurement: milimeters

Cable Carrier T20.10

Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°C;


Links with fixed crossbars;

Available in 3 radius.

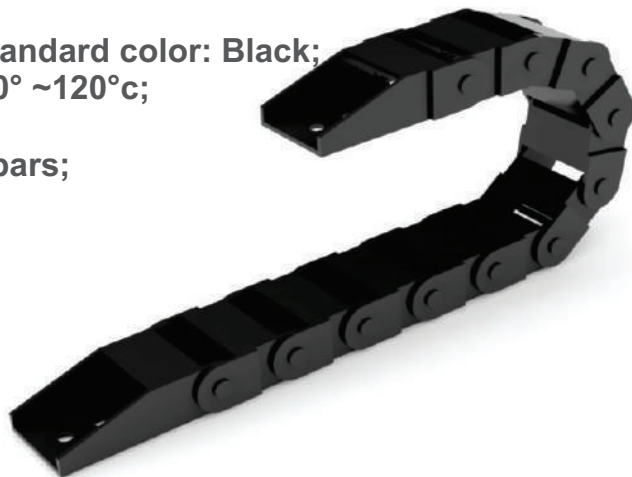





Mounting Brackets

Each cable carrier needs one set of mounting brackets made by two brackets. Each bracket should be fixed in each end of the cable carrier.

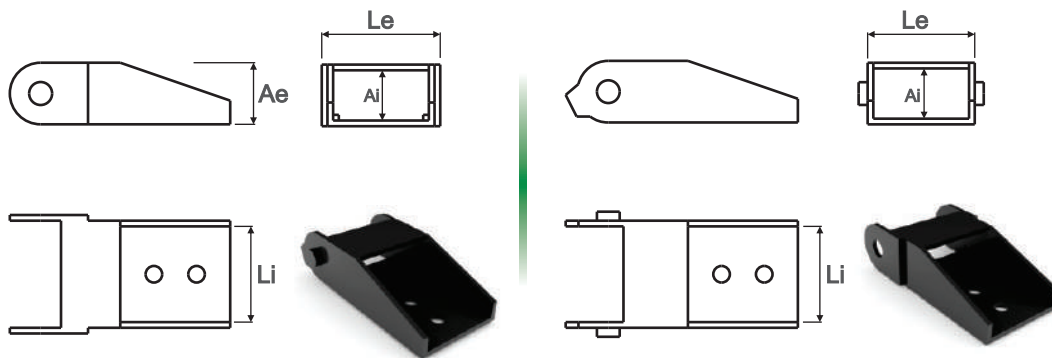


CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03071	MOUNTING BRACKETS SET T20.10	20,6X10,6	25X13

Technical Specifications

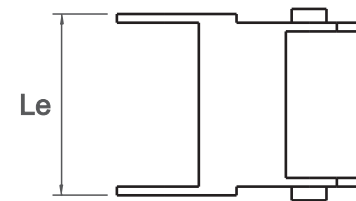

Radius

18
28
38

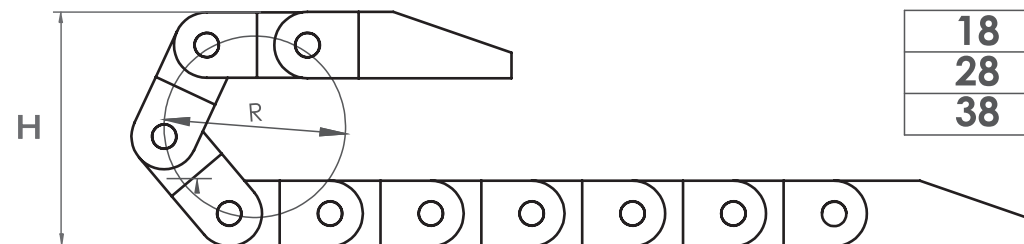

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/METRO	WEIGHT/METRO
03046	CABLE CARRIER T20.10.R18mm	20,6X10,6	25X13	46	18	20	49	123gr
03074	CABLE CARRIER T20.10.R28mm	20,6X10,6	25X13	70	28	20	49	123gr
03075	CABLE CARRIER T20.10.R38mm	20,6X10,6	25X13	87	38	20	49	123gr

*Unit of measurement: milimeters

Cable Carrier T25.25

Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°C;


Opening system that facilitates changes and
maintenances of the cables and hoses.

Available in 3 radius.




Mounting Brackets

Each cable carrier needs one set of mounting brackets made by two
brackets. Each bracket should be fixed in each end of the cable carrier.

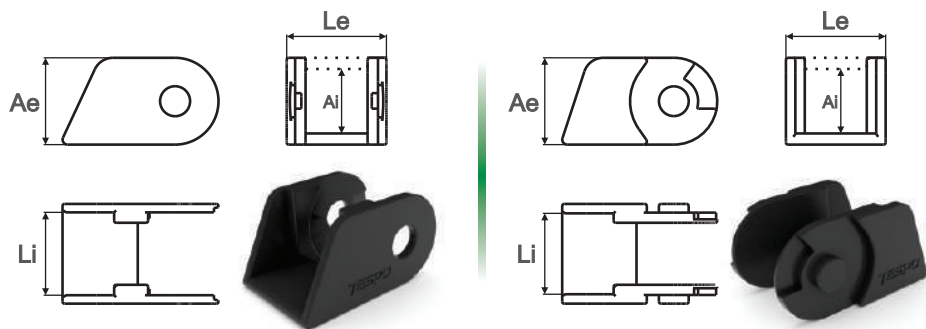

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03609	MOUNTING BRACKETS SET T 25.25	25X25	40X35

Technical Specifications

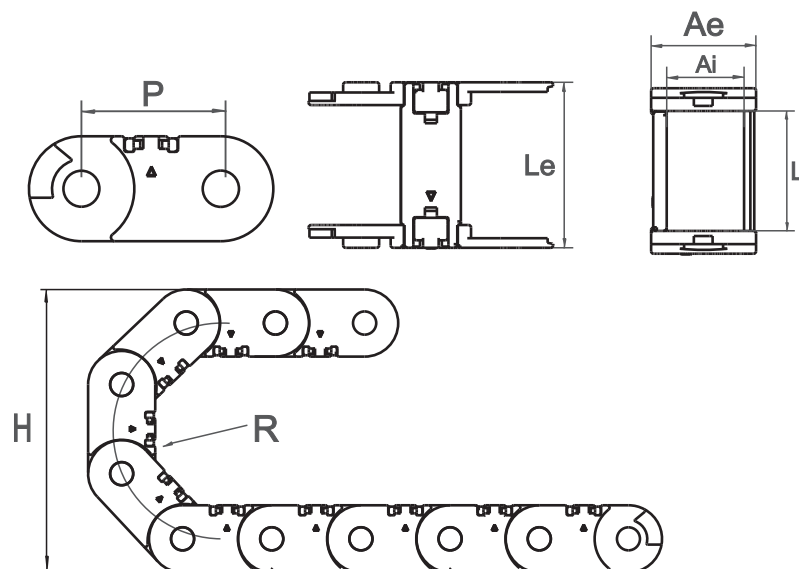

Radius

55
75
100

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METRO	WEIGHT/ METRO
03603	CABLE CARRIER T25.25 R55mm	25X25	40X35	140	55	46	21	714gr
03604	CABLE CARRIER T25.25 R75mm	25X25	40X35	177	75	46	21	714gr
03605	CABLE CARRIER T25.25 R100mm	25X25	40X35	235	100	46	21	714gr

*Unit of measurement: millimeters

Link Assembly Plan



To open the side of the movable lock, follow steps 3 to 1
helped by a screwdriver.

Cable Carrier T40.25

Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;


Opening system that facilitates changes and
maintenances of the cables and hoses.

Available in 3 radius.




Mounting Brackets

Each cable carrier needs one set of mounting brackets made by two
brackets. Each bracket should be fixed in each end of the cable carrier.

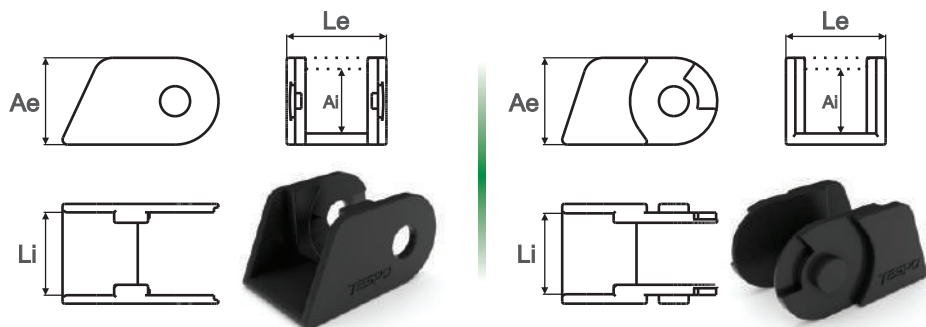

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03612	MOUNTING BRACKETS SET T40.25	40X25	55x35

Technical Specifications

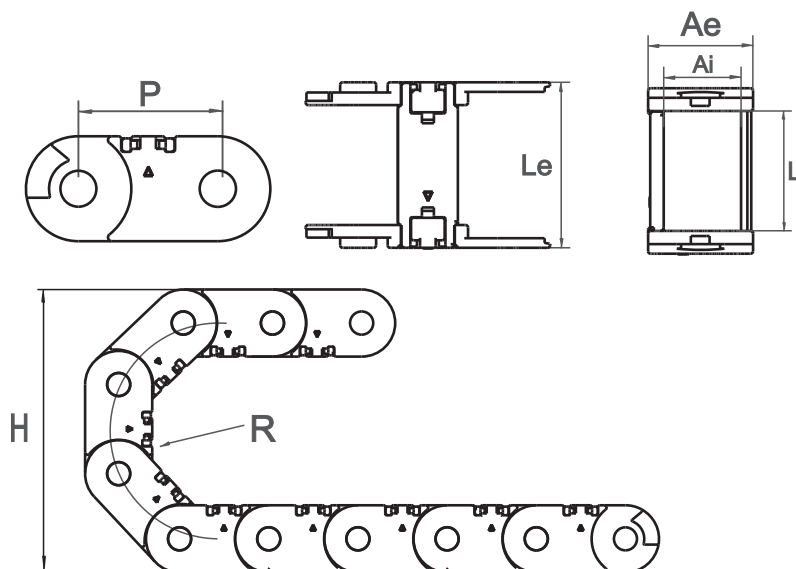

Radius

55
75
100

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METRO	WEIGHT/ METRO
03606	CABLE CARRIER T40.25 R55mm	40X25	55x35	140	55	46	21	756gr
03607	CABLE CARRIER T40.25 R75mm	40X25	55x35	177	75	46	21	756gr
03608	CABLE CARRIER T40.25 R100mm	40X25	55x35	235	100	46	21	756gr

*Unit of measurement: millimeters

Link Assembly Plan



To open the side of the movable lock, follow steps 3 to 1
helped by a screwdriver.

Cable Carrier T28.20

Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;


Opening system that facilitates changes and
maintenances of the cables and hoses.

Available in 3 radius.




Mounting Brackets

Each cable carrier needs one set of mounting brackets made by two
brackets. Each bracket should be fixed in each end of the cable carrier.

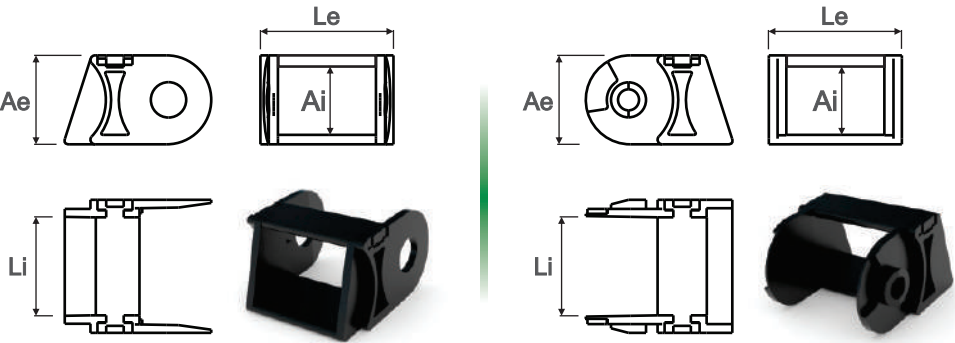

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03638	MOUNTING BRACKETS SET T28.20	28X20	38X25

Technical Specifications

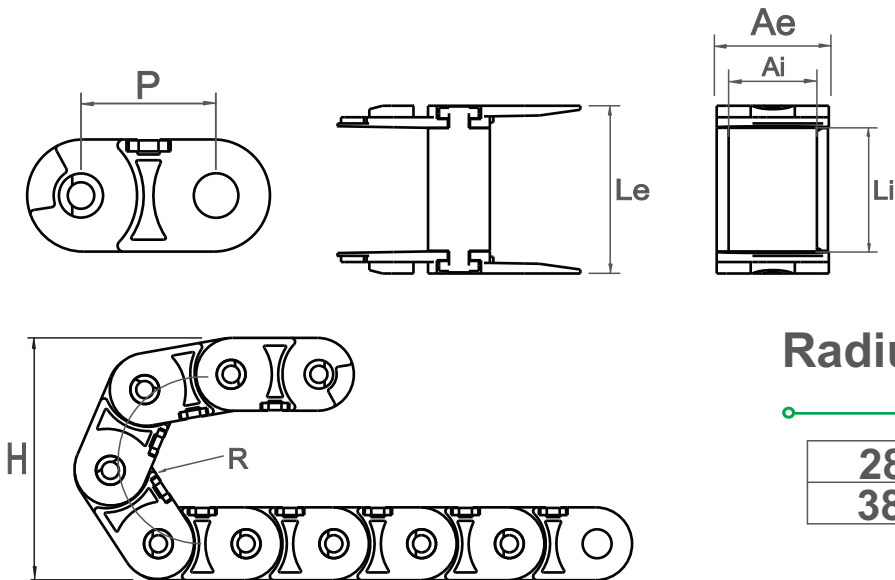

Radius

28
38

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METRO	WEIGHT/ METRO
03636	CABLE CARRIER T28.20 R28mm	28X20	38X25	80	28	31	32	340gr
03637	CABLE CARRIER T28.20 R38mm	28X20	38X25	100	38	31	32	340gr

*Unit of measurement: milimeters

Link Assembly Plan




Cable Carrier T50.25


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°C;

Opening system that facilitates changes and
maintenances of the cables and hoses.

Model with cables separator;

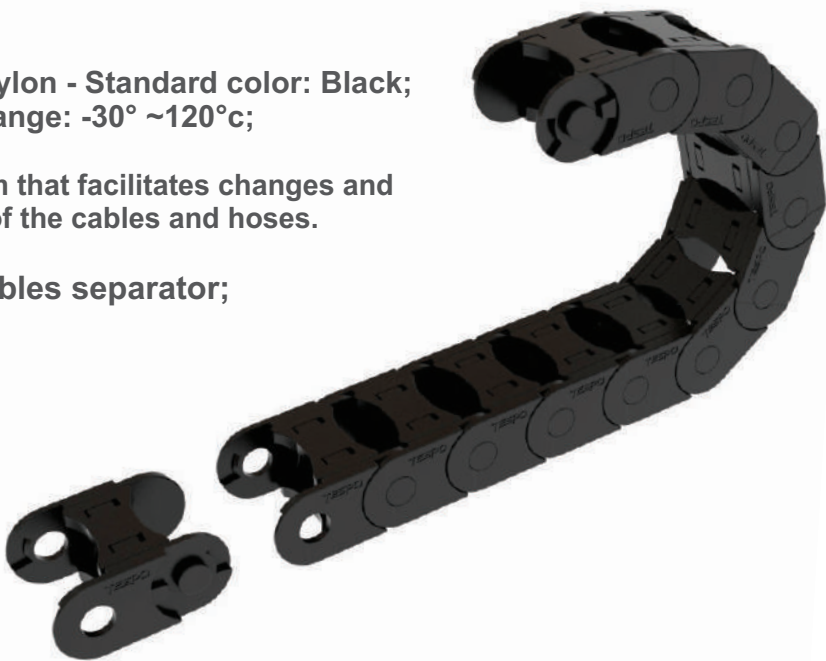


Technical Specifications

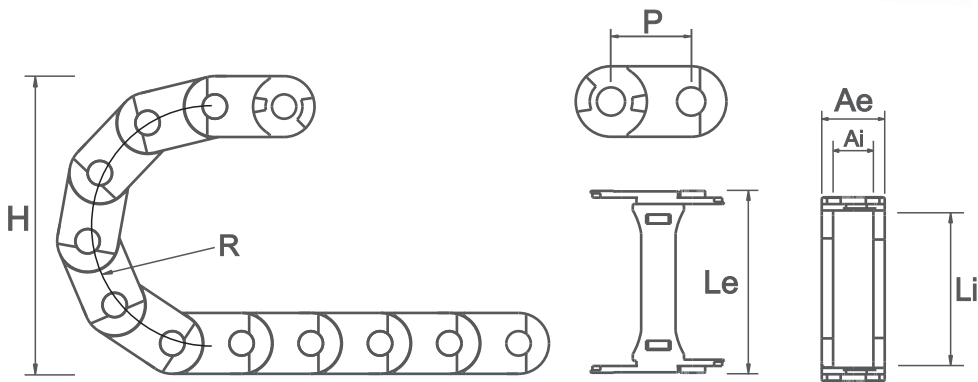

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METER	WEIGHT/ METER
03840	CABLE CARRIER T50.25.R75	50X25	67X40	190	75	46	22	1232gr
03841	CABLE CARRIER T50.25.R100	50X25	67X40	240	100	46	22	1232gr


Mounting bracket

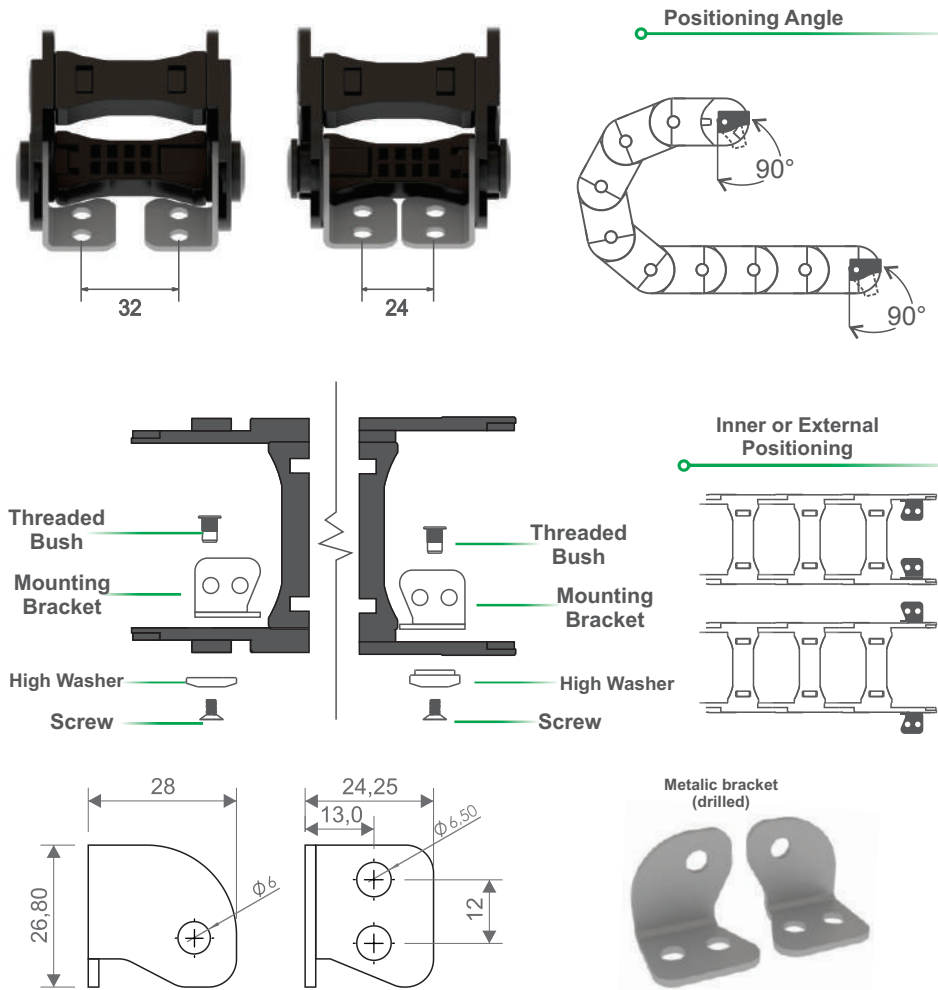

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03856	MOUNTING BRACKET SET	50X25	76X40

*Unit of measurement: millimeters

Cables Separator (Cód. 03860)

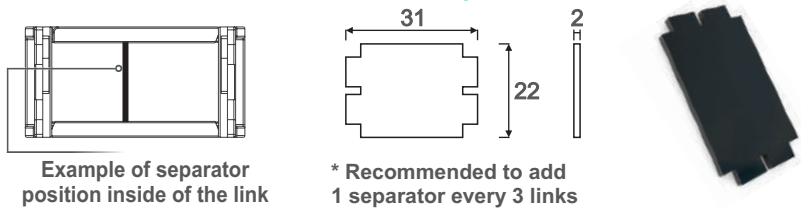

Example of separator
position inside of the link

* Recommended to add
1 separator every 3 links

Assembly Plan

Step 1




Step 2



Step 3



Final Assembly

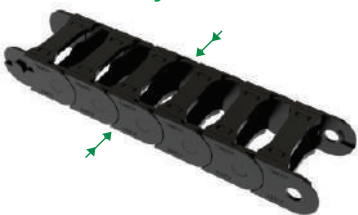

*Optional wrench is available to
help during assembly process
(Cód.03684)




Cable Carrier T75.25


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;

Opening system that facilitates changes and
maintenances of the cables and hoses.

Model with cables separator;

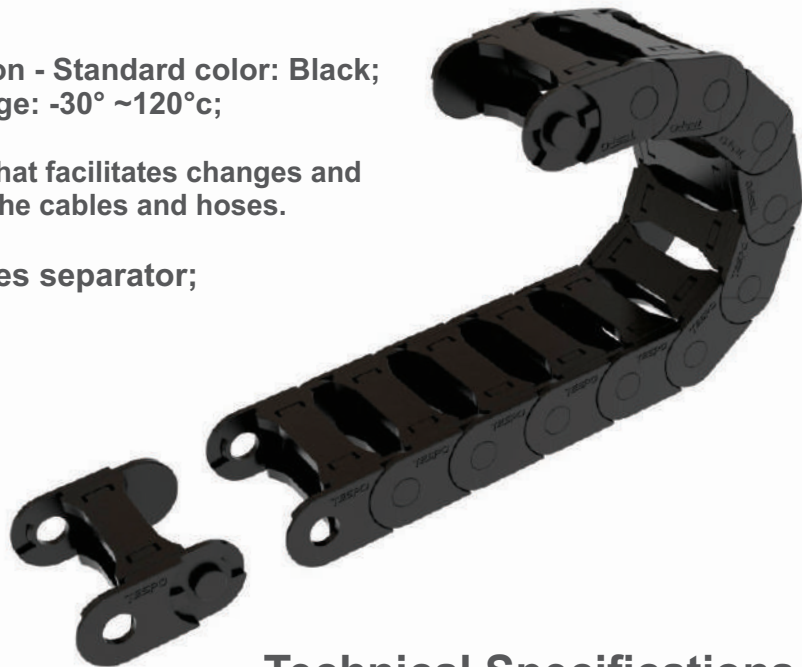


Technical Specifications

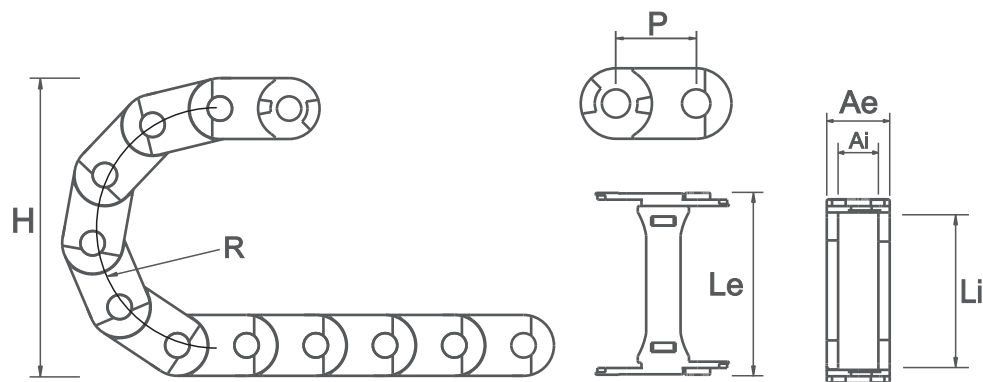

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METER	WEIGHT/ METER
03842	CABLE CARRIER T50.25.R75	75X25	92X40	190	75	46	22	1408gr
03843	CABLE CARRIER T50.25.R100	75X25	92X40	240	100	46	22	1408gr


Mounting bracket

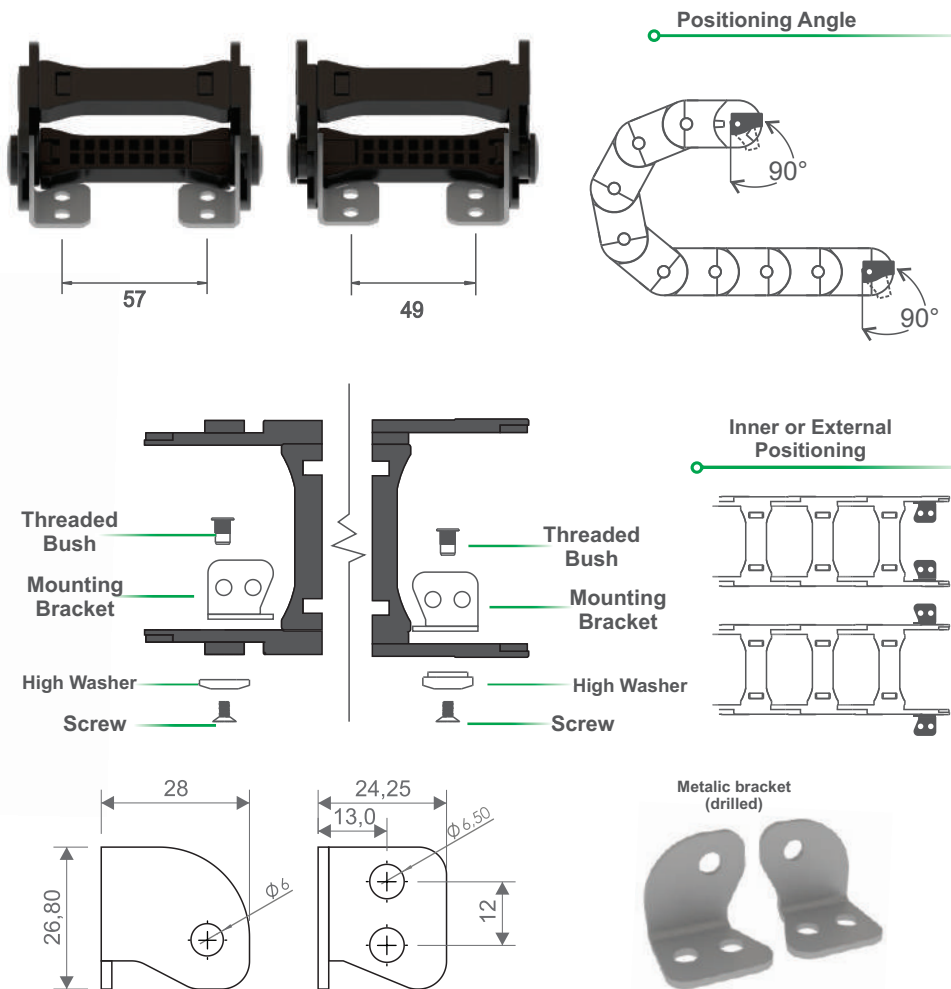

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03857	MOUNTING BRACKET SET	75X25	101X40

*Unit of measurement: millimeters

Cables Separator (Cód. 03860)

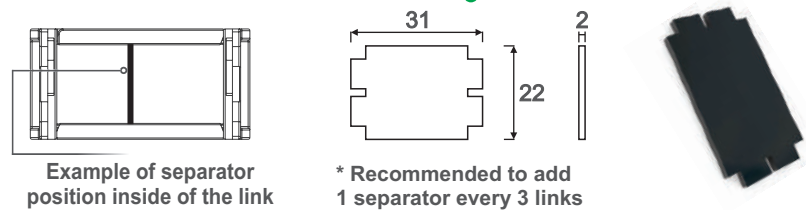


Assembly Plan

Step 1




Step 2

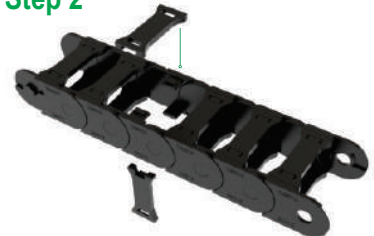

Step 3



Final Assembly

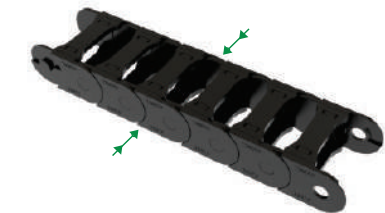

*Optional wrench is available to
help during assembly process
(Cód.03684)



Cable Carrier T100.25


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°C;

Opening system that facilitates changes and
maintenances of the cables and hoses.

Model with cables separator;




Technical Specifications

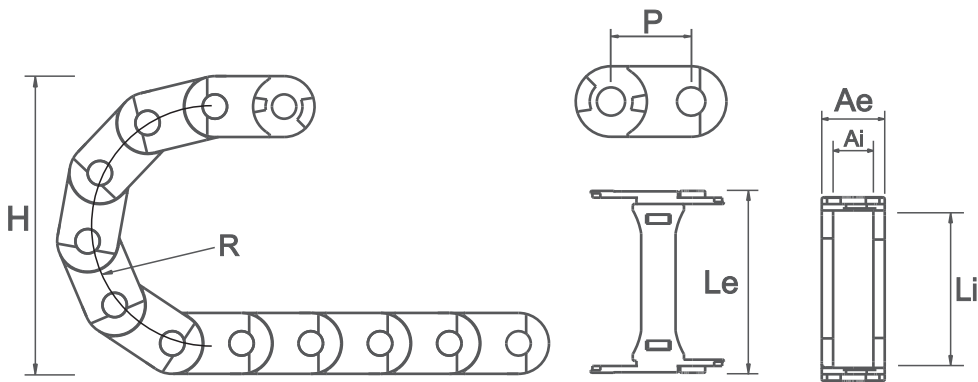

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METER	WEIGHT/ METER
03844	CABLE CARRIER T50.25.R75	100X25	117X40	190	75	46	22	1562gr
03845	CABLE CARRIER T50.25.R100	100X25	117X40	240	100	46	22	1562gr


Mounting bracket

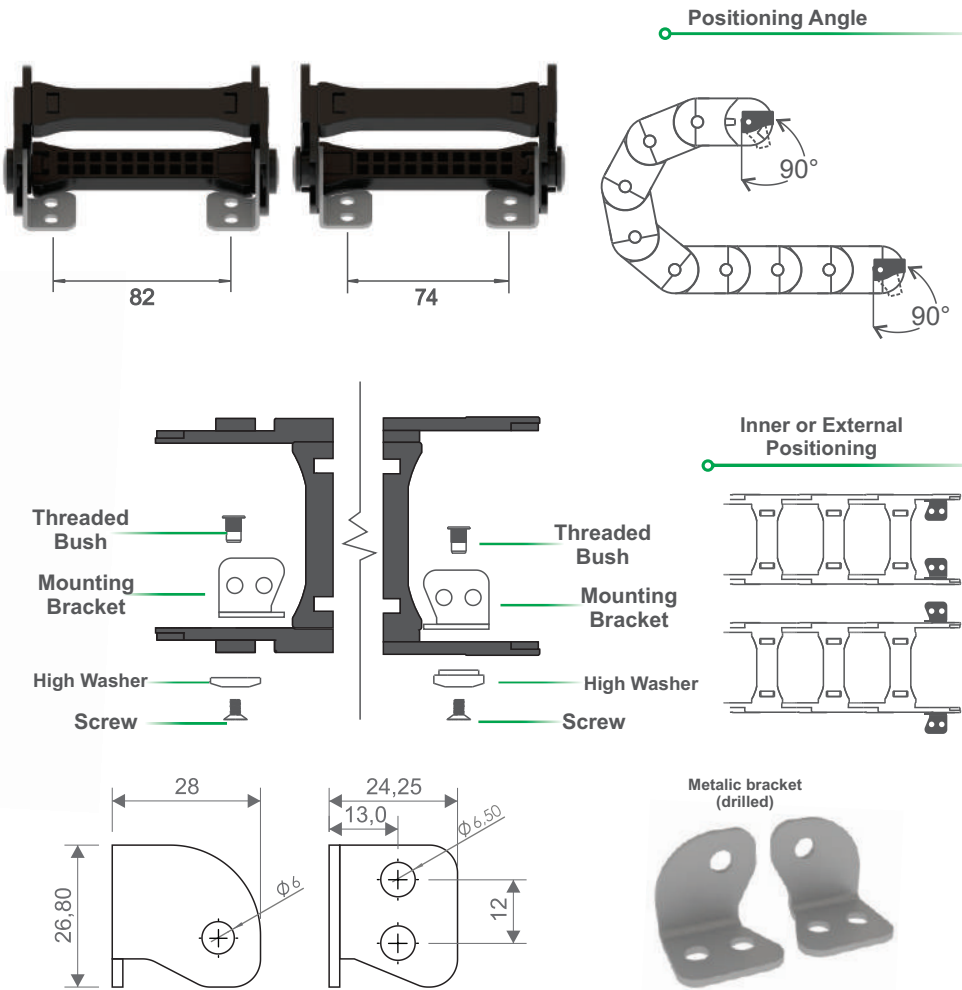

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03858	MOUNTING BRACKET SET	100X25	126X40

*Unit of measurement: millimeters

Cables Separator (Cód. 03860)

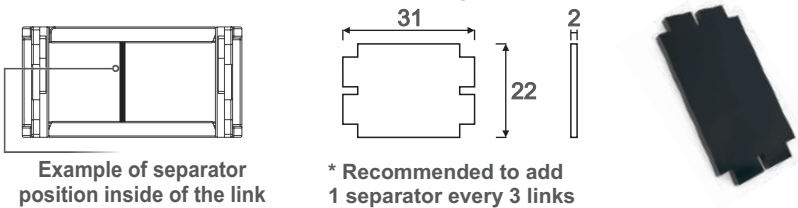

* Recommended to add
1 separator every 3 links

Assembly Plan

Step 1




Step 2



Step 3



Final Assembly

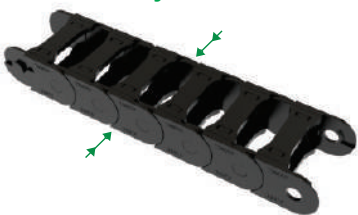

*Optional wrench is available to
help during assembly process
(Cód.03684)



Cable Carrier T125.25


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;

Opening system that facilitates changes and
maintenances of the cables and hoses.

Model with cables separator;




Technical Specifications

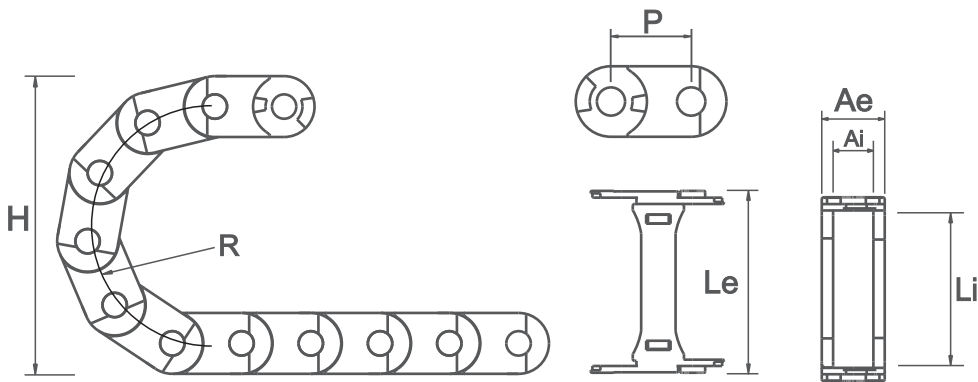

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METER	WEIGHT/ METER
03846	CABLE CARRIER T50.25.R75	125X25	142X40	190	75	46	22	1760gr
03847	CABLE CARRIER T50.25.R100	125X25	142X40	240	100	46	22	1760gr


Mounting bracket

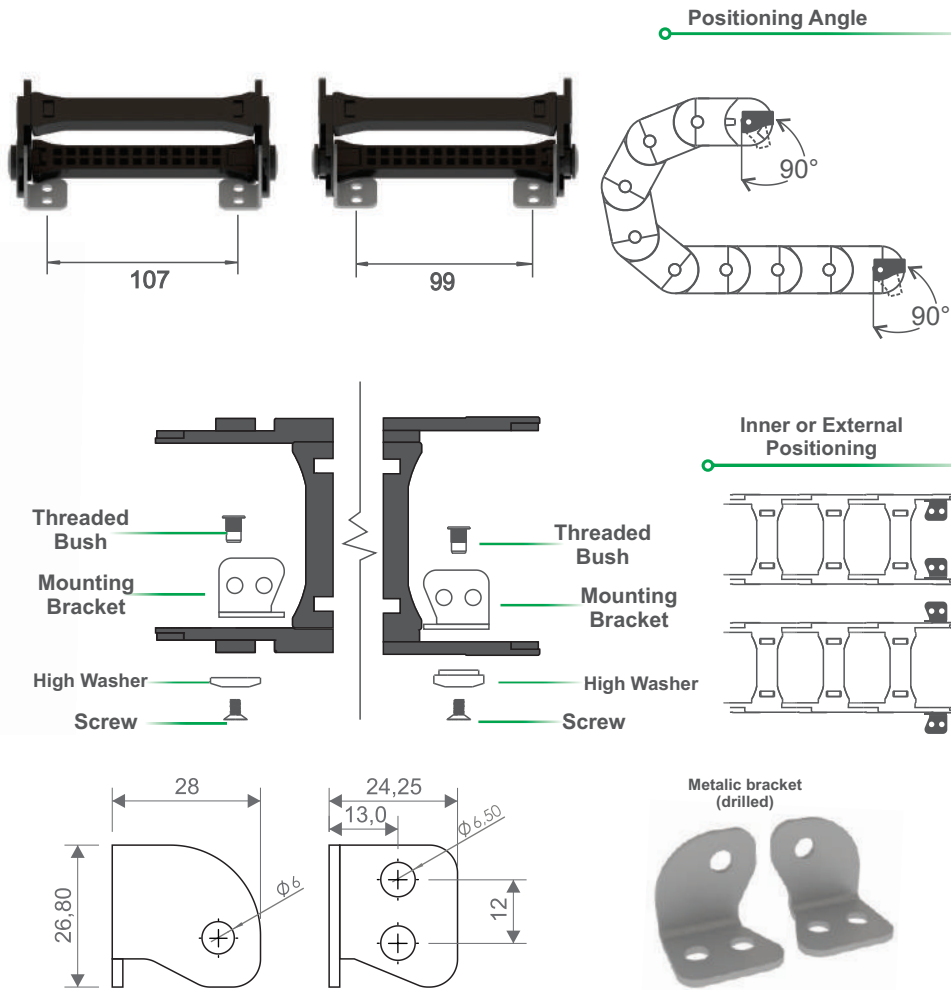

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03859	MOUNTING BRACKET SET	125X25	151X40

*Unit of measurement: millimeters

Cables Separator (Cód. 03861)

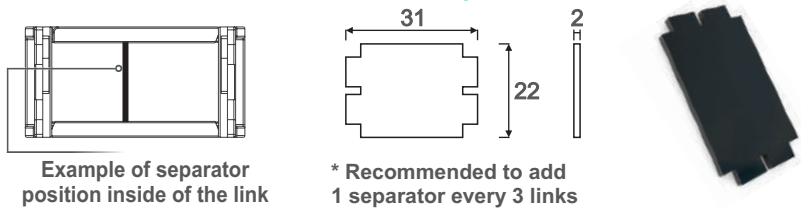

Assembly Plan

Step 1




Step 2




Step 3



Final Assembly

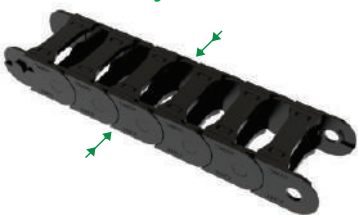

*Optional wrench is available to
help during assembly process
(Cód.03684)



Cable Carrier T50.25 C/R


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;

Opening system that facilitates changes and
maintenances of the cables and hoses.


Model with cables separator;

Model with reinforcing rivets.

*Recommended for hydraulic cables or for cable
carriers with more than 4 meters length.

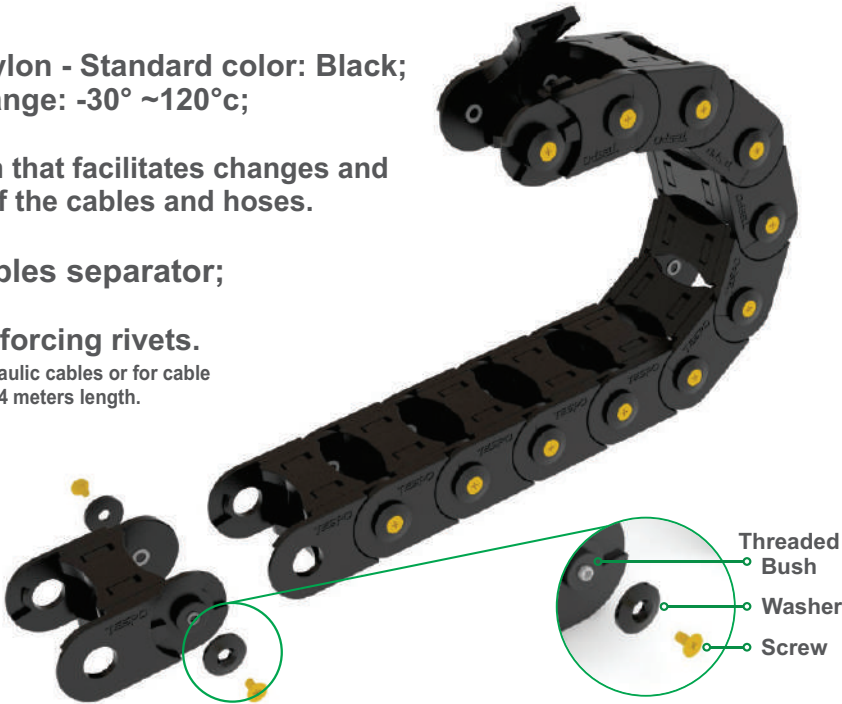


Technical Specifications

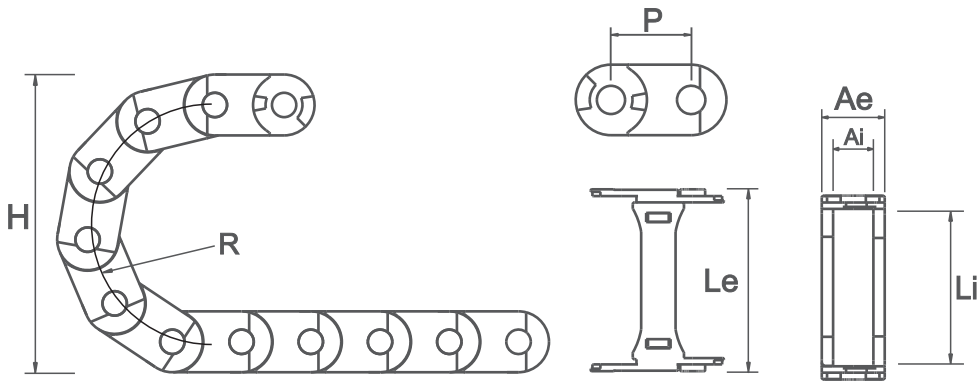


CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METER	WEIGHT/ METER
03848	CABLE CARRIER T50.25.R75 WITH REINFORCEMENTS	50X25	67X40	190	75	46	22	1364gr
03849	CABLE CARRIER T50.25.R100 WITH REINFORCEMENTS	50X25	67X40	240	100	46	22	1364gr

Mounting bracket

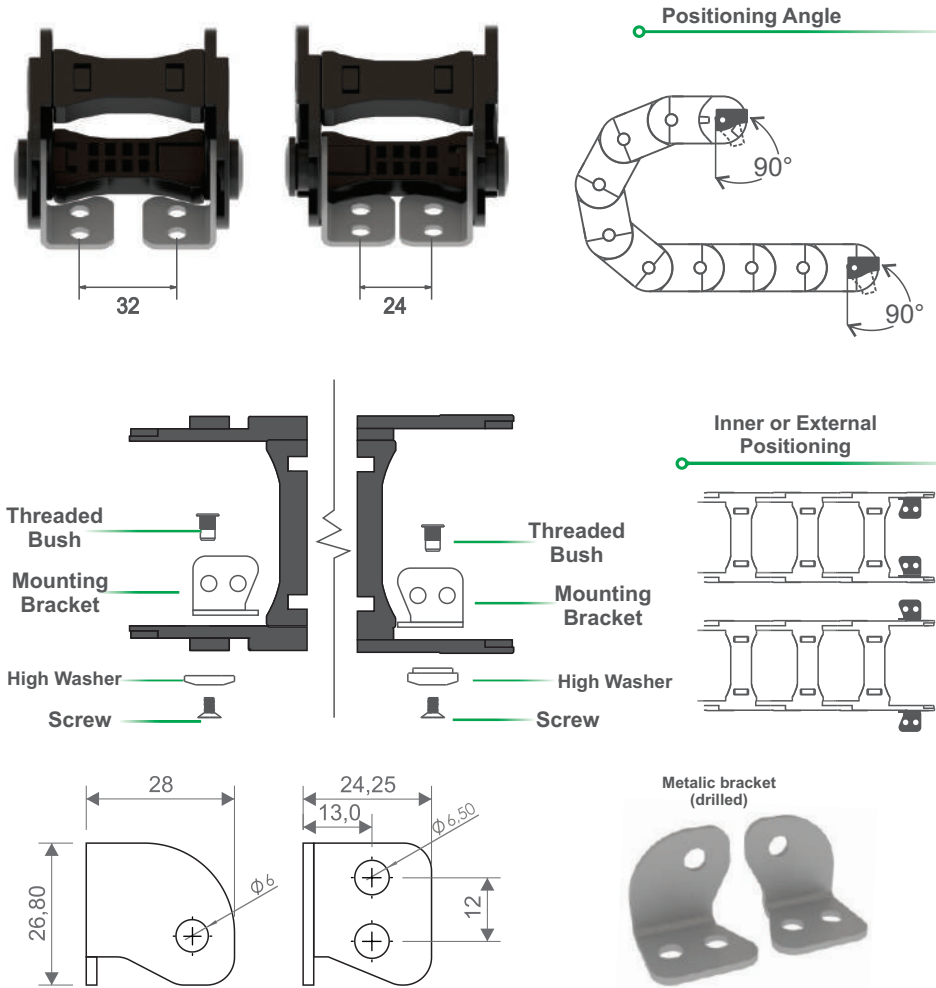


*Unit of measurement: millimeters

Cables Separator (Cód. 03860)

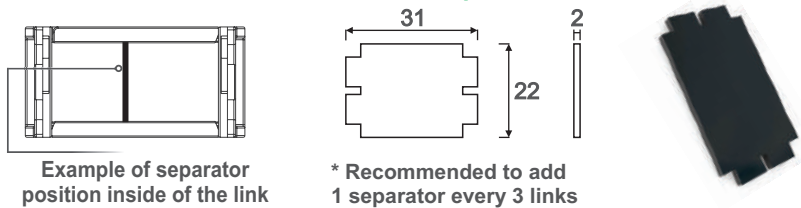

Assembly Plan

Step 1

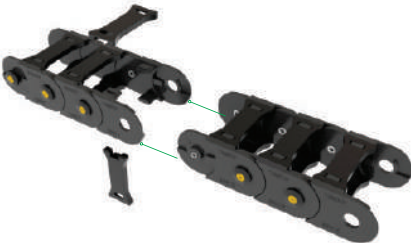


Step 2



Step 3



Final Assembly

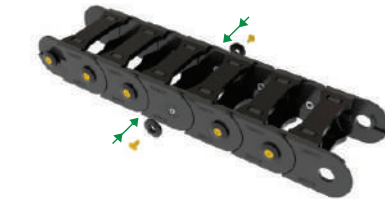

*Optional wrench is available to
help during assembly process
(Cód.03684)



Cable Carrier T75.25 C/R


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;

Opening system that facilitates changes and
maintenances of the cables and hoses.


Model with cables separator;

Model with reinforcing rivets.

*Recommended for hydraulic cables or for cable
carriers with more than 4 meters length.

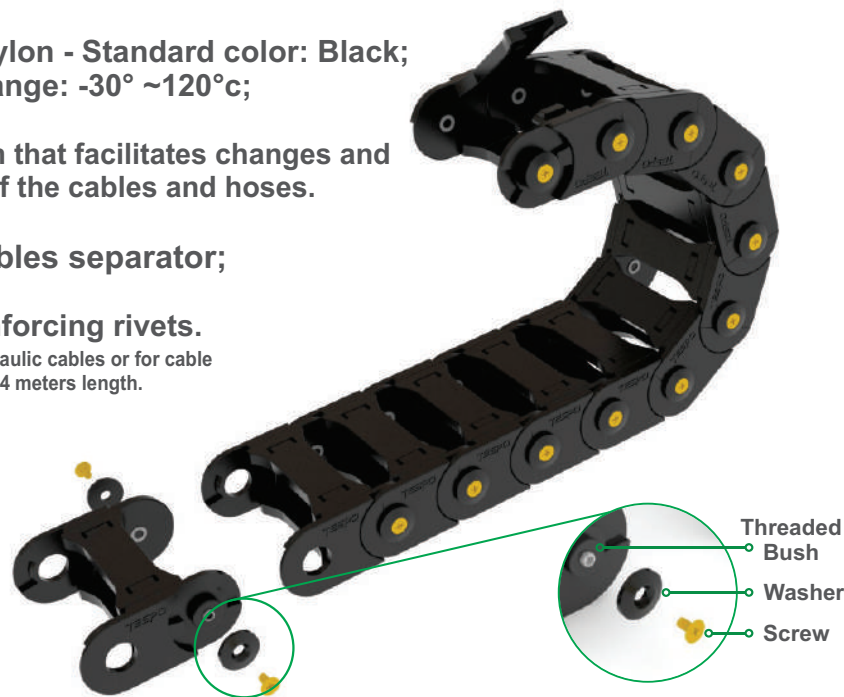


Technical Specifications

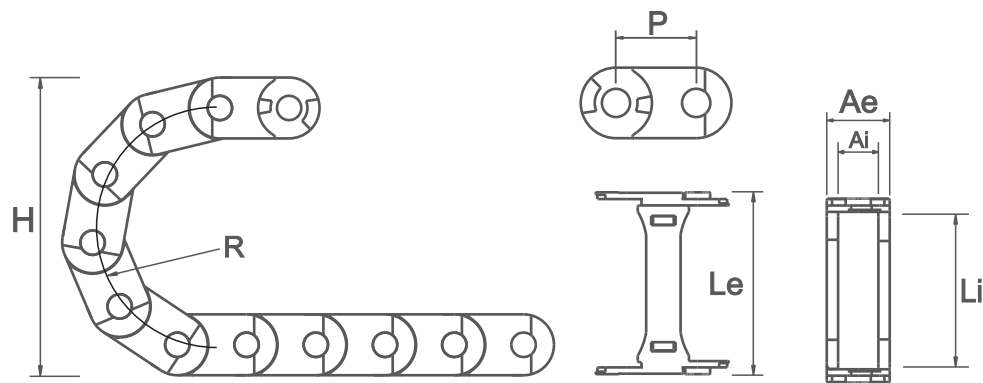

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METER	WEIGHT/ METER
03850	CABLE CARRIER T50.25.R75 WITH REINFORCEMENTS	75X25	101X40	190	75	46	22	1540gr
03851	CABLE CARRIER T50.25.R100 WITH REINFORCEMENTS	75X25	101X40	240	100	46	22	1540gr


Mounting bracket

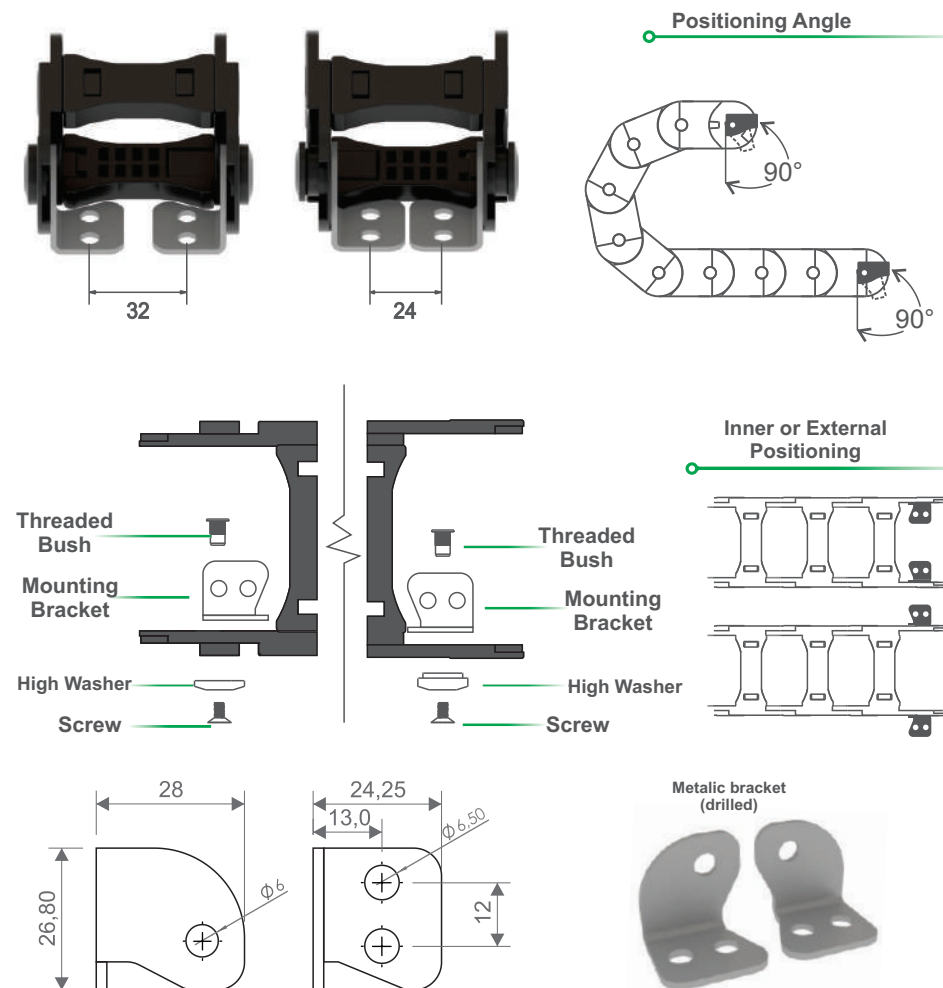

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03857	MOUNTING BRACKET SET	75X25	101X40


*Unit of measurement: millimeters

Cables Separator (Cód. 03860)

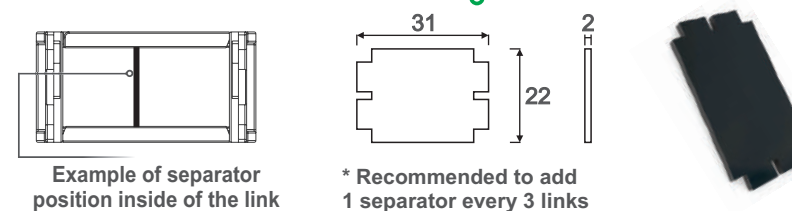

Assembly Plan

Step 1

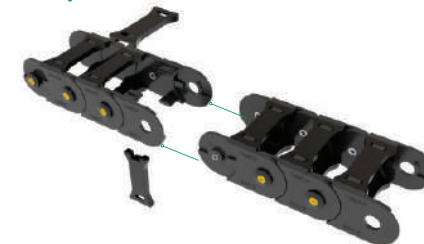

Step 2



Step 3



Final Assembly



*Optional wrench is available to
help during assembly process
(Cód.03684)



Cable Carrier T100.25 C/R


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;

Opening system that facilitates changes and
maintenances of the cables and hoses.


Model with cables separator;

Model with reinforcing rivets.

*Recommended for hydraulic cables or for cable
carriers with more than 4 meters length.

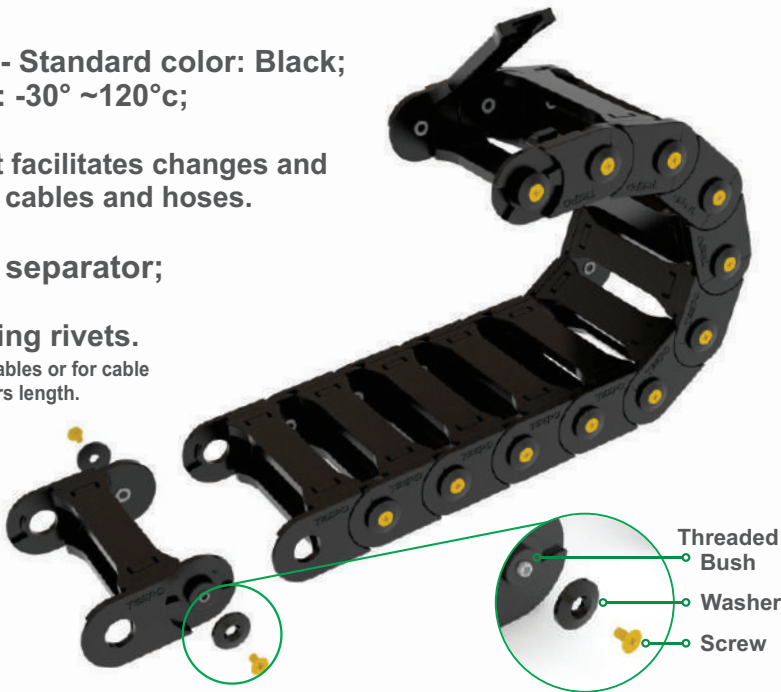


Technical Specifications

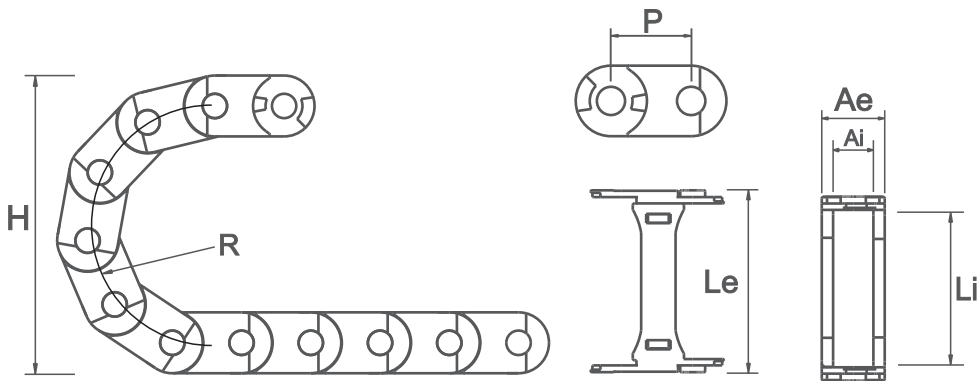

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METER	WEIGHT/ METER
03852	CABLE CARRIER T50.25.R75 WITH REINFORCEMENTS	100X25	126X40	190	75	46	22	1694gr
03853	CABLE CARRIER T50.25.R100 WITH REINFORCEMENTS	100X25	126X40	240	100	46	22	1694gr


Mounting bracket

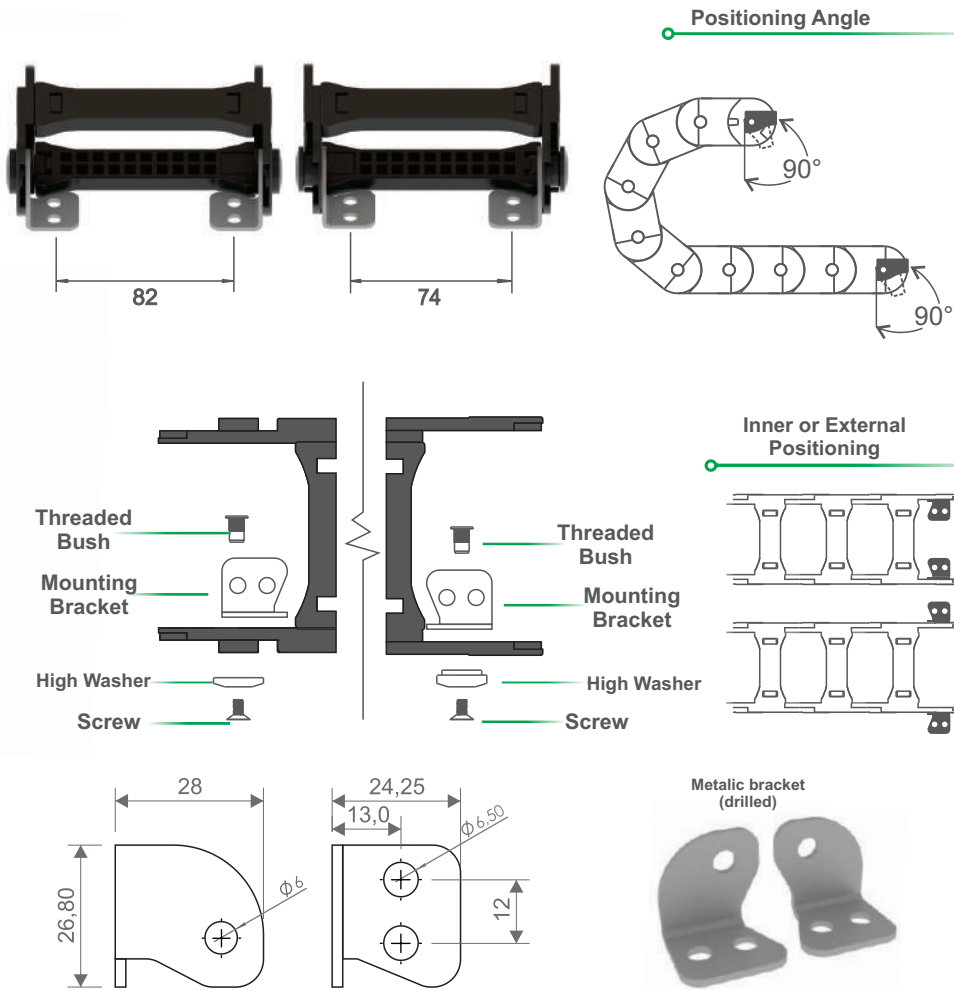

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03858	MOUNTING BRACKET SET	100X25	126X40


*Unit of measurement: millimeters

Cables Separator (Cód. 03860)

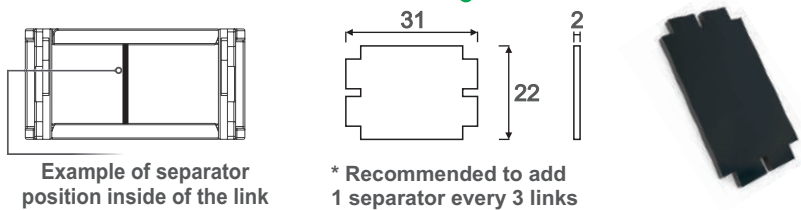

Assembly Plan

Step 1

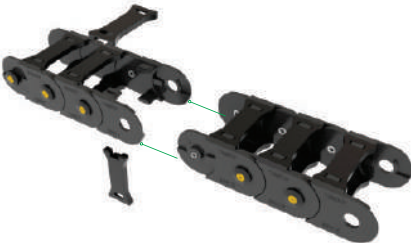


Step 2



Step 3



Final Assembly

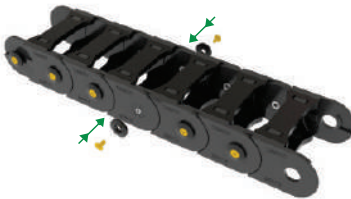

*Optional wrench is available to
help during assembly process
(Cód.03684)



Cable Carrier T125.25 C/R


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;

Opening system that facilitates changes and
maintenances of the cables and hoses.


Model with cables separator;

Model with reinforcing rivets.

*Recommended for hydraulic cables or for cable
carriers with more than 4 meters length.

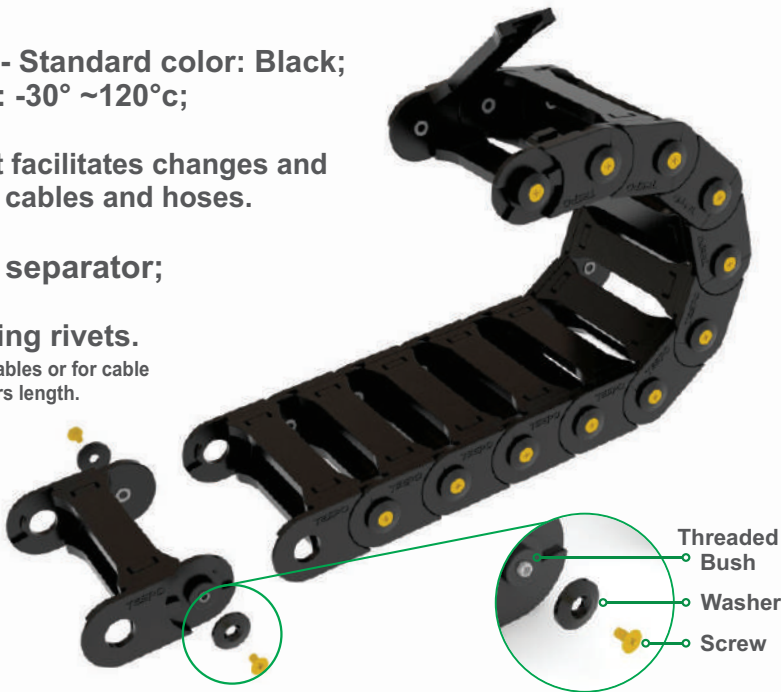


Technical Specifications

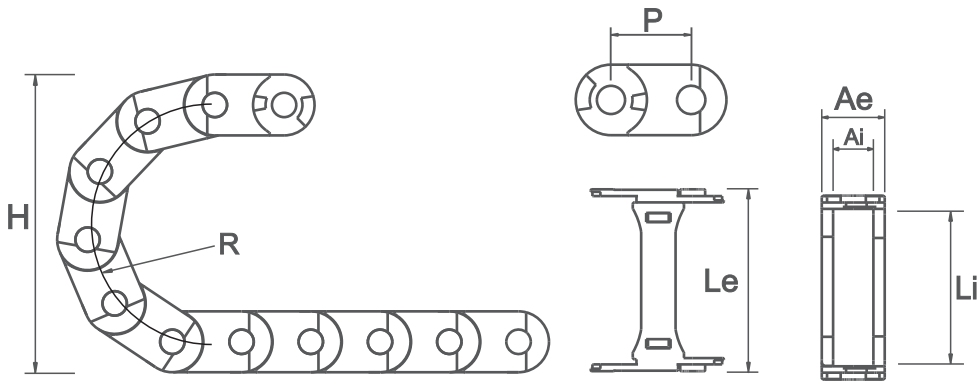

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METER	WEIGHT/ METER
03854	CABLE CARRIER T50.25.R75 WITH REINFORCEMENTS	125X25	151X40	190	75	46	22	1892gr
03855	CABLE CARRIER T50.25.R100 WITH REINFORCEMENTS	125X25	151X40	240	100	46	22	1892gr


Mounting bracket

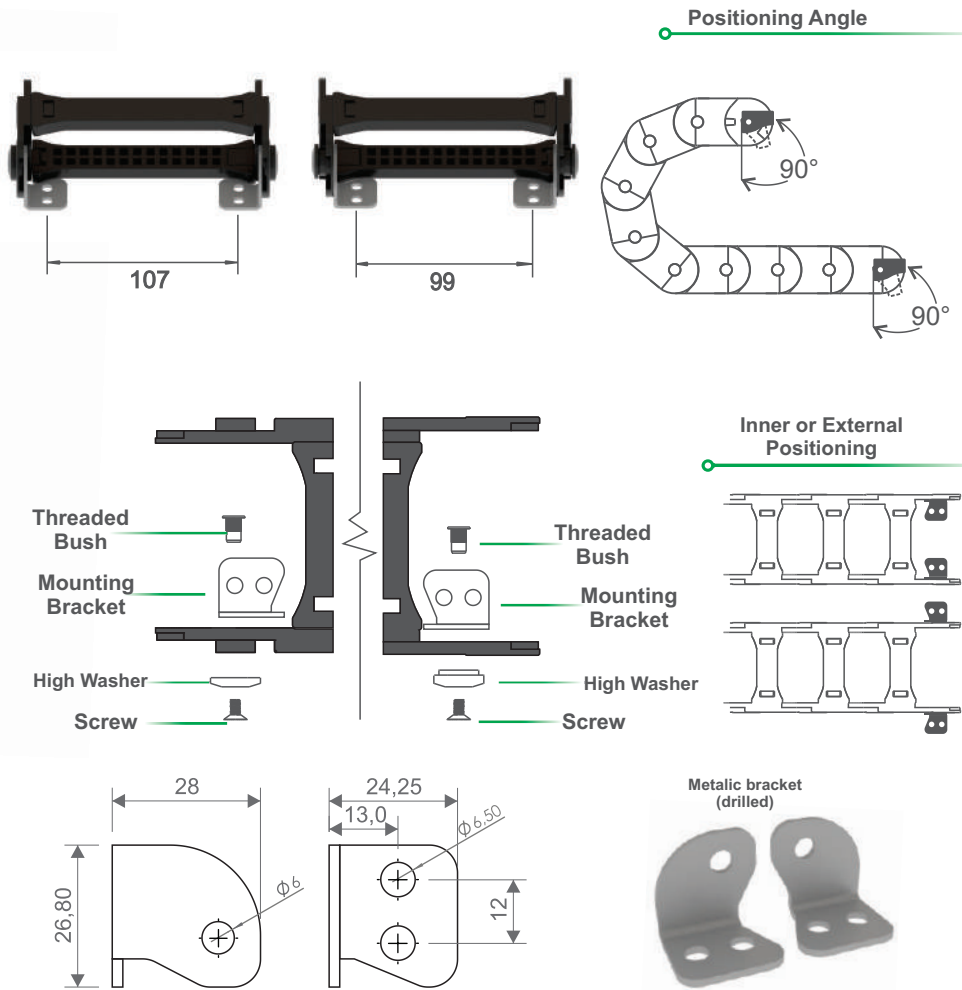

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03859	MOUNTING BRACKET SET	125X25	151X40


*Unit of measurement: millimeters

Cables Separator (Cód. 03861)

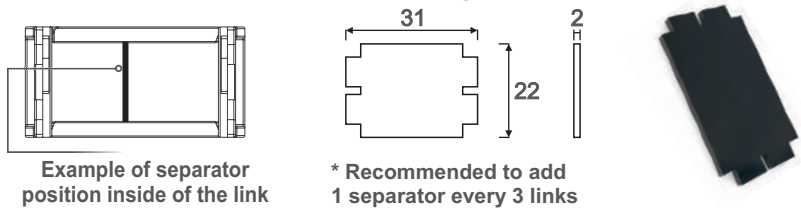

Assembly Plan


Step 1

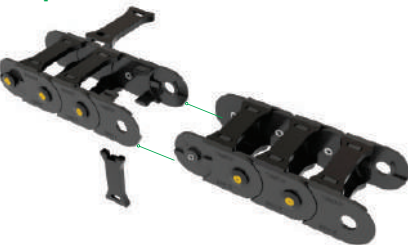


Step 2



Step 3

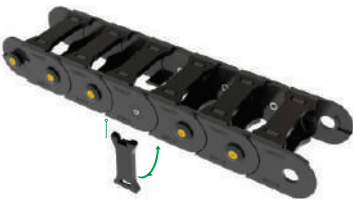

Final Assembly

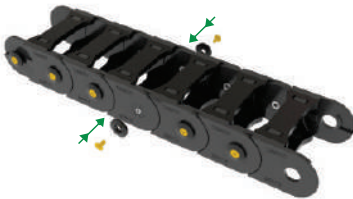

*Optional wrench is available to
help during assembly process
(Cód.03684)



Cable Carrier T50.35


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;

Opening system that facilitates changes and
maintenances of the cables and hoses.

Model with cables separator.




Technical Specifications

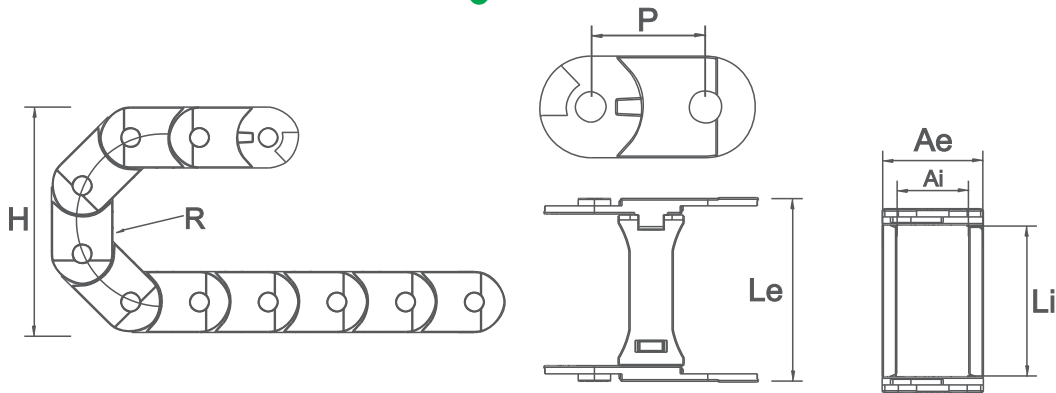

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METRO	WEIGHT/ METRO
03467	CABLE CARRIER T50.35 R75mm	50x35	66x50	185	75	56	18	1430gr
03770	CABLE CARRIER T50.35 R150mm	50x35	66x50	335	150	56	18	1430gr

*Unit of measurement: millimeters

Cables Separator (Cód. 03558)

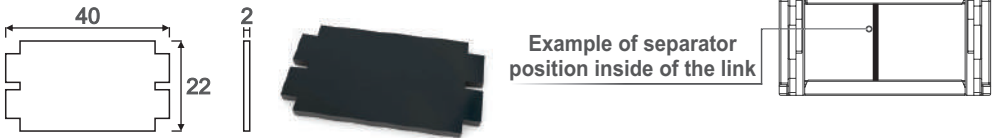


* Recommended to add
1 separator every 3 links


Mounting Brackets

Each cable carrier needs one set of mounting brackets made by two
brackets. Each bracket should be fixed in each end of the cable carrier.



CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03468	MOUNTING BRACKETS SET T50.35	50x35	74x50

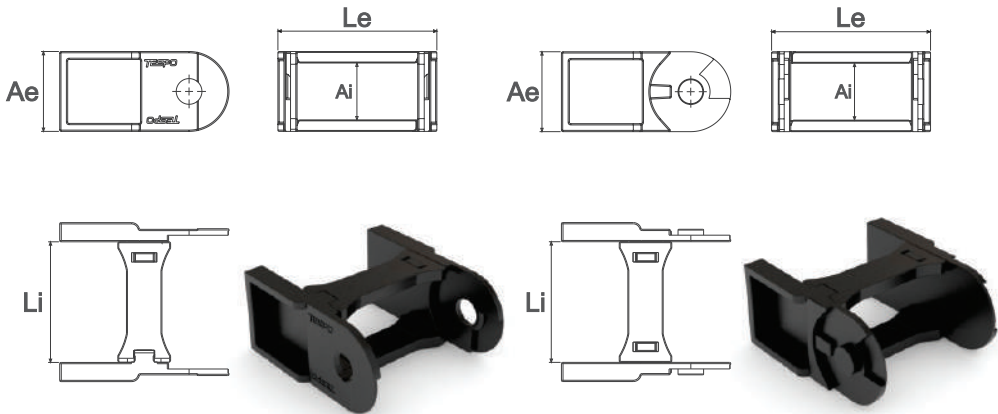

For fixing the mounting brackets, you
can add holes in the highlighted area.



Assembly Plan

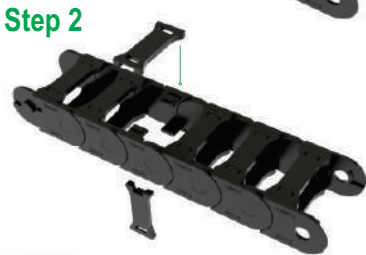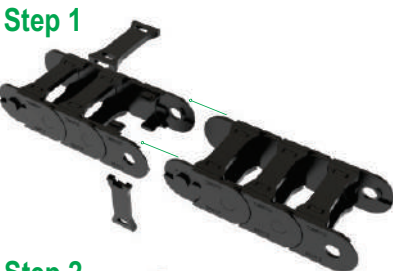

*Optional wrench is available to
help during assembly process
(Cód.03684)




Cable Carrier T75.35


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;

Opening system that facilitates changes and
maintenances of the cables and hoses.

Model with cables separator.

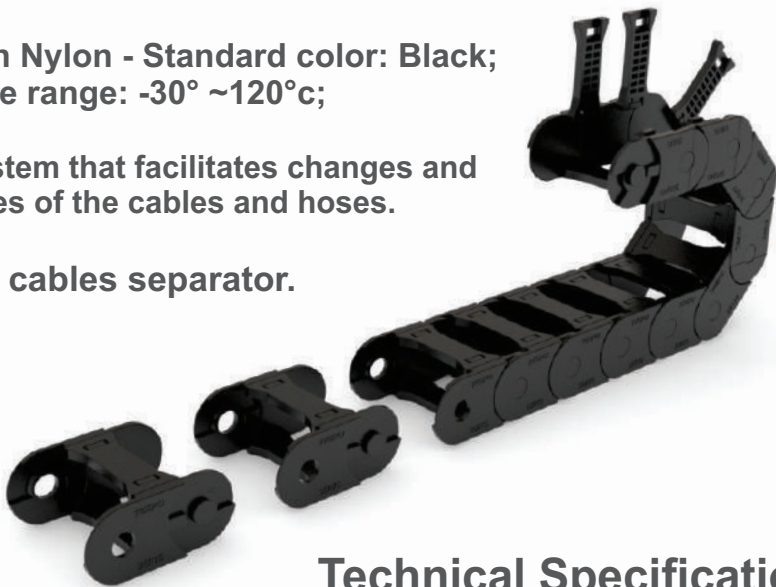


Technical Specifications

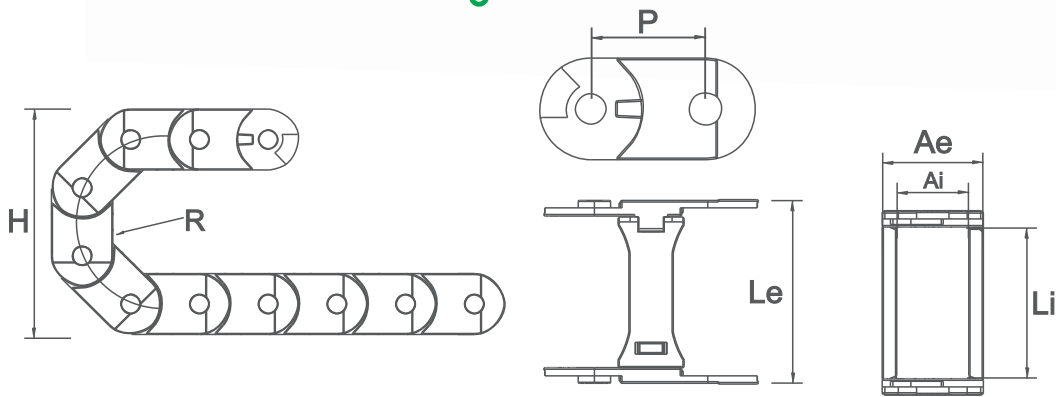

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METRO	WEIGHT/ METRO
03483	CABLE CARRIER T75.35 R75mm	75x35	91x50	185	75	56	18	1570gr
03772	CABLE CARRIER T75.35 R150mm	75x35	91x50	335	150	56	18	1570gr

*Unit of measurement: milimeters

Cables Separator (Cód. 03558)

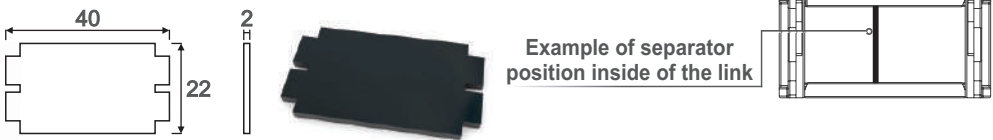


* Recommended to add
1 separator every 3 links


Mounting Brackets

Each cable carrier needs one set of mounting brackets made by two
brackets. Each bracket should be fixed in each end of the cable carrier.



CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03485	MOUNTING BRACKETS SET T75.35	75x35	99x50

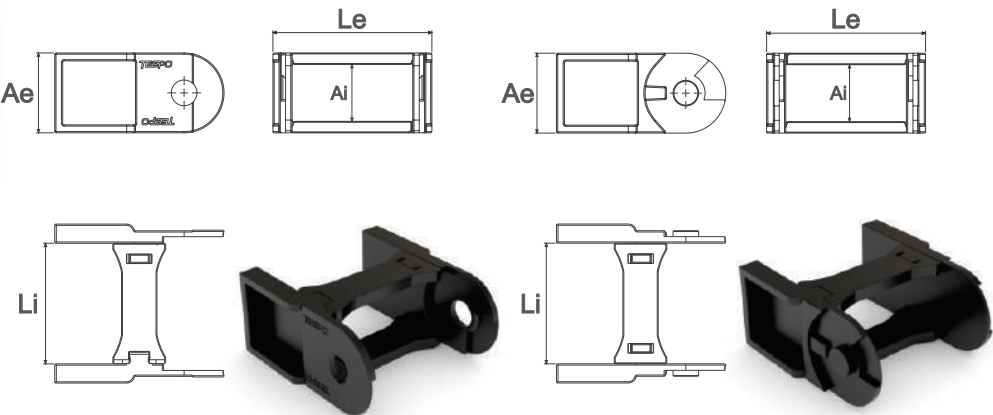

For fixing the mounting brackets, you
can add holes in the highlighted area.



Assembly Plan

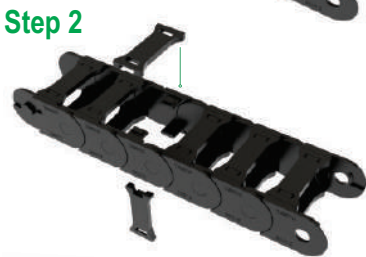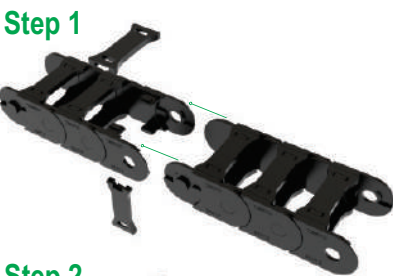

*Optional wrench is available to
help during assembly process
(Cód.03684)




Cable Carrier T100.35


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;

Opening system that facilitates changes and
maintenances of the cables and hoses.

Model with cables separator.

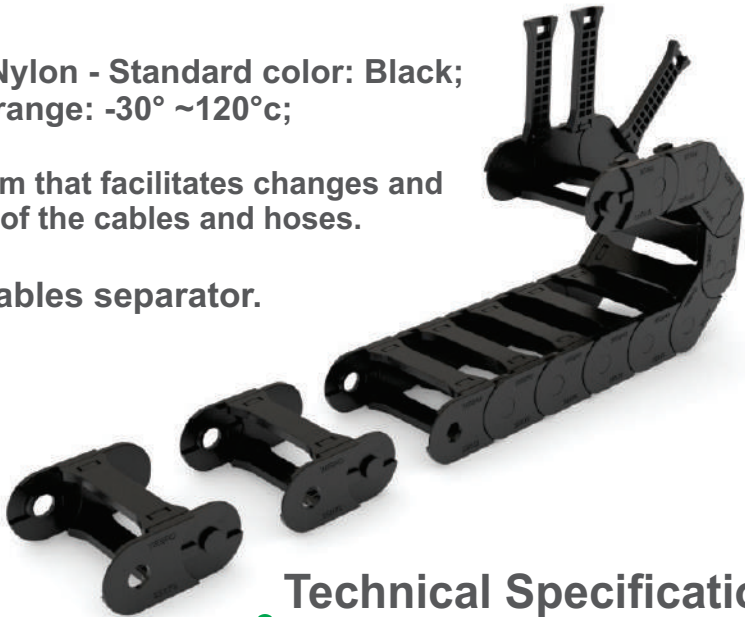


Technical Specifications

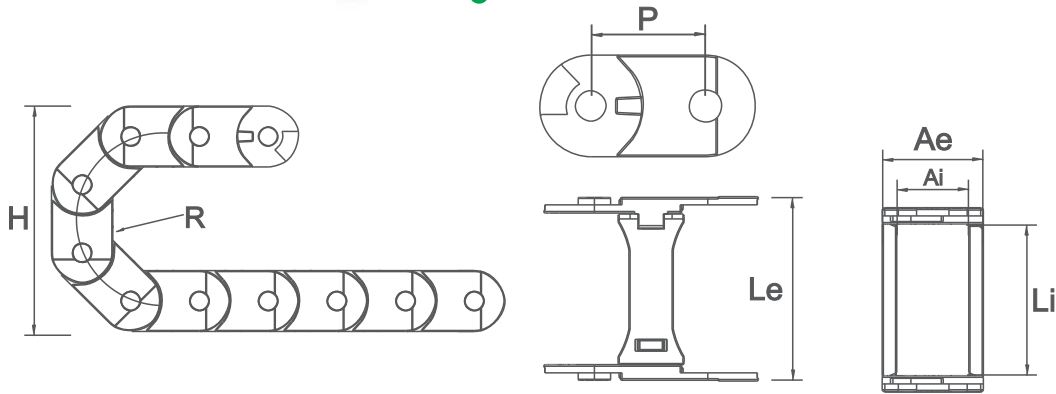

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METRO	WEIGHT/ METRO
03484	CABLE CARRIER T100.35 R75mm	100x35	116x50	185	75	56	18	1760gr
03774	CABLE CARRIER T100.35 R150mm	100x35	116x50	335	150	56	18	1760gr

*Unit of measurement: millimeters

Cables Separator (Cód. 03558)

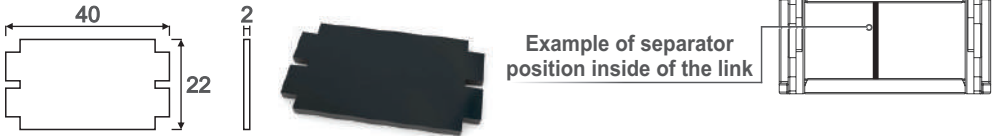


* Recommended to add
1 separator every 3 links


Mounting Brackets

Each cable carrier needs one set of mounting brackets made by two
brackets. Each bracket should be fixed in each end of the cable carrier.


CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03485	MOUNTING BRACKETS SET T100.35	100x35	124x50

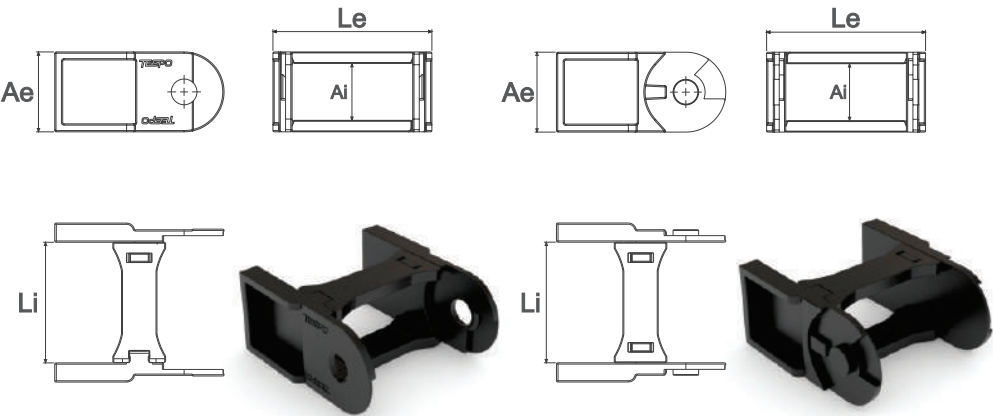


For fixing the mounting brackets, you
can add holes in the highlighted area.



Assembly Plan

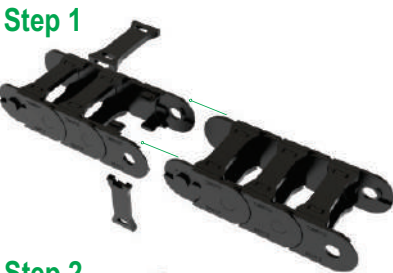

*Optional wrench is available to
help during assembly process
(Cód.03684)




Cable Carrier T125.35


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;

Opening system that facilitate changes and
maintenances of the cables and hoses.

Model with cables separator.

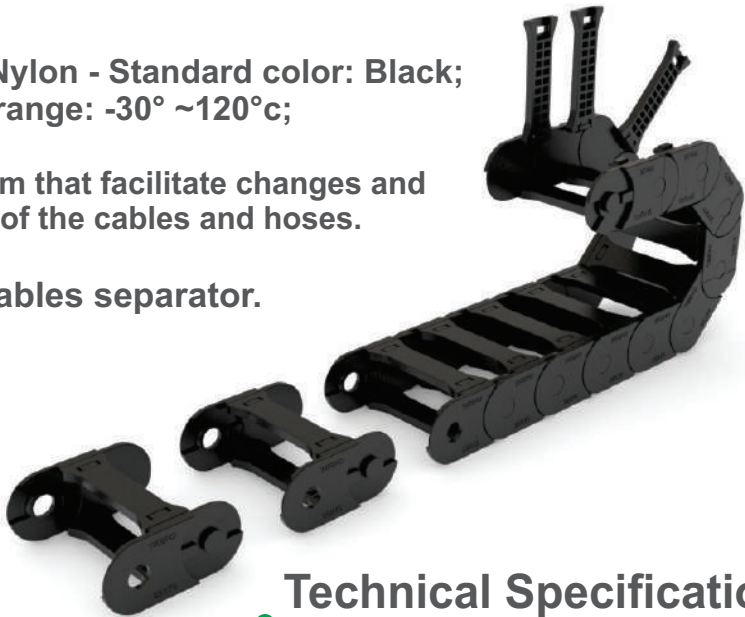


Technical Specifications

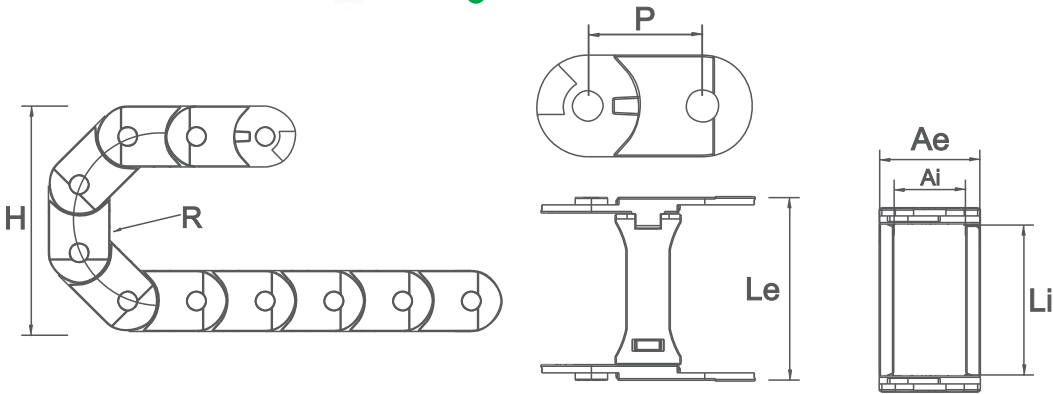

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METRO	WEIGHT/ METRO
03687	CABLE CARRIER T125.35 R75mm	125x35	142x50	185	75	56	18	1800gr
03776	CABLE CARRIER T125.35 R150mm	125x35	142x50	335	150	56	18	1800gr

*Unit of measurement: milimeters

Cables Separator (Cód. 03691)

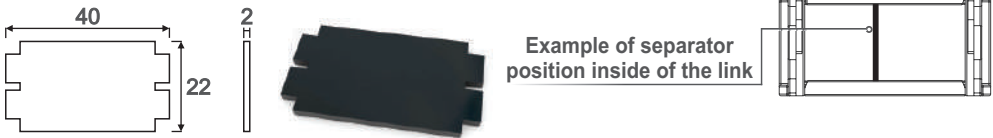


* Recommended to add
1 separator every 3 links


Mounting Brackets

Each cable carrier needs one set of mounting brackets made by two
brackets. Each bracket should be fixed in each end of the cable carrier.


CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03689	MOUNTING BRACKETS SET T125.35	125x35	150x50

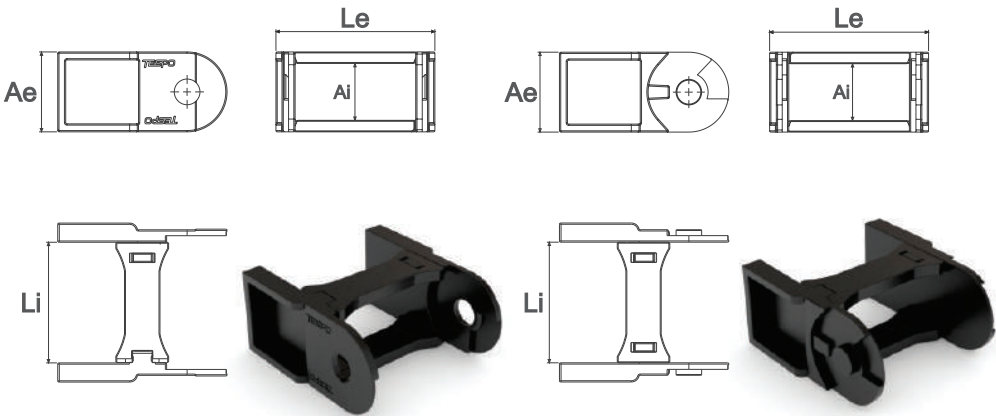


For fixing the mounting brackets, you
can add holes in the highlighted area.



Assembly Plan

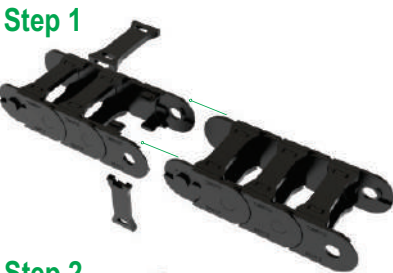

*Optional wrench is available to
help during assembly process
(Cód.03684)



Cable Carrier T50.35 C/R

Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;


Opening system that facilitates changes and
maintenances of the cables and hoses.

Model with cables separator;

Model with reinforcing rivets.

*Recommended for hydraulic cables or for cable
carriers with more than 4 meters length.


Technical Specifications

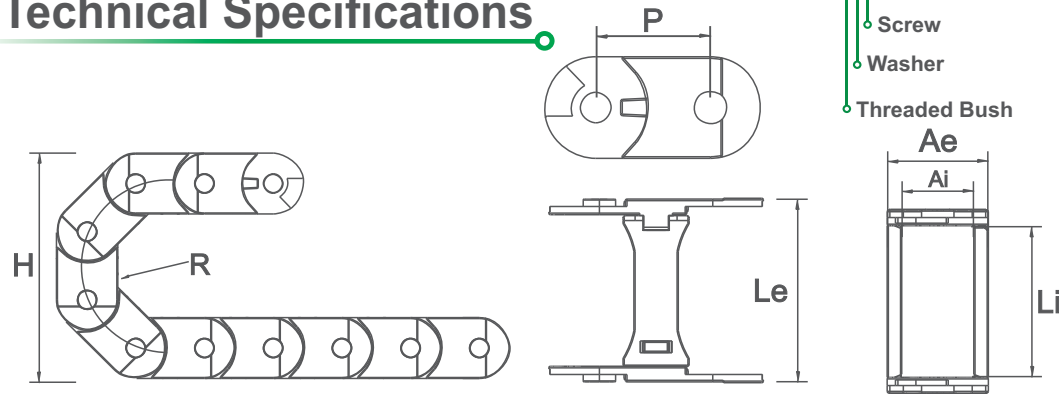


CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METRO	WEIGHT/ METRO
03660	CABLE CARRIER T50.35 R75mm With REINFORCEMENT	50x35	75x50	185	75	56	18	1475gr
03771	CABLE CARRIER T50.35 R150mm With REINFORCEMENT	50x35	75x50	335	150	56	18	1475gr

*Unit of measurement: milimeters

Cables Separator (Cód. 03558)



Example of separator
position inside of the link









* Recommended to add
1 separator every 3 links


Mounting Brackets

Each cable carrier needs one set of mounting brackets made by two
brackets. Each bracket should be fixed in each end of the cable carrier.

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03468	MOUNTING BRACKETS SET T50.35	50x35	74x50




For fixing the mounting brackets, you
can add holes in the highlighted area.



Assembly Plan

Step 1

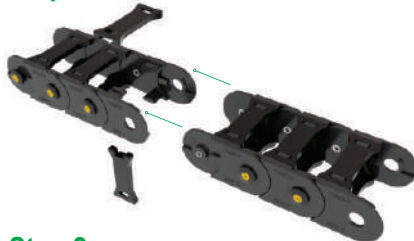

Step 2




Step 3



Final Assembly



*Optional wrench is available to
help during assembly process
(Cód.03684)



Cable Carrier T75.35 C/R


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°C;

Opening system that facilitates changes and
maintenances of the cables and hoses.


Model with cables separator;

Model with reinforcing rivets.

*Recommended for hydraulic cables or for cable
carriers with more than 4 meters length.

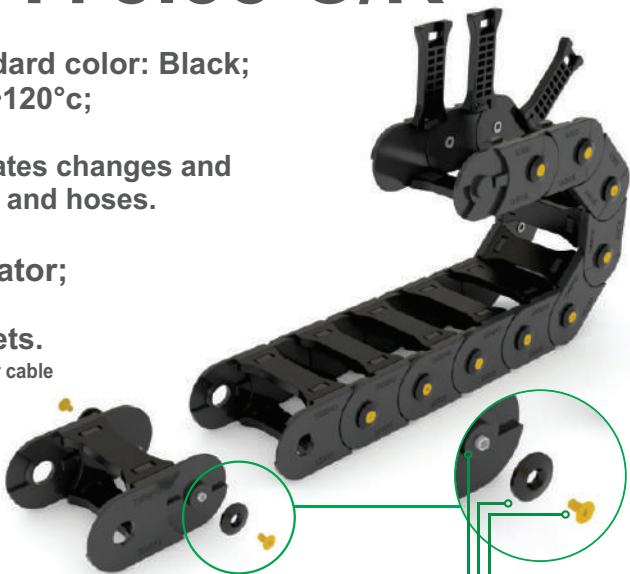


Technical Specifications

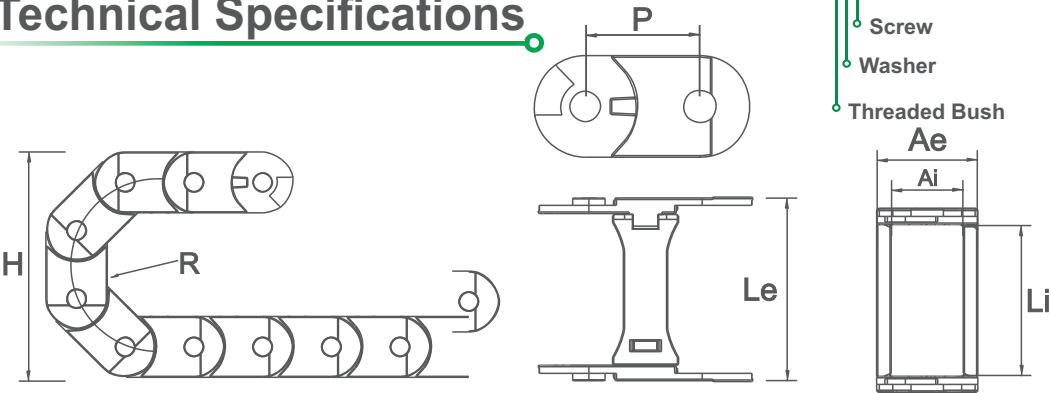


CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METRO	WEIGHT/ METRO
03640	CABLE CARRIER T75.35 R75mm With REINFORCEMENTS	75x35	102x50	185	75	56	18	1670gr
03773	CABLE CARRIER T75.35 R150mm With REINFORCEMENTS	75x35	102x50	335	150	56	18	1670gr

*Unit of measurement: millimeters

Cables Separator (Cód. 03558)



Example of separator
position inside of the link









* Recommended to add
1 separator every 3 links


Mounting Brackets

Each cable carrier needs one set of mounting brackets made by two
brackets. Each bracket should be fixed in each end of the cable carrier.

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03485	MOUNTING BRACKETS SET T75.35	75x35	99x50




For fixing the mounting brackets, you
can add holes in the highlighted area.



Assembly Plan

Step 1

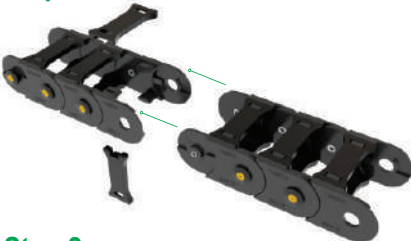


Step 2




Step 3



Final Assembly

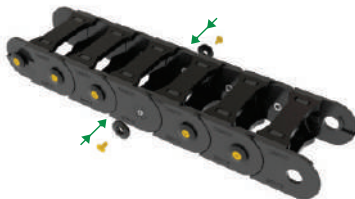

*Optional wrench is available to
help during assembly process
(Cód.03684)



Cable Carrier T100.35 C/R


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°C;

Opening system that facilitates changes and
maintenances of the cables and hoses.


Model with cables separator;

Model with reinforcing rivets.

*Recommended for hydraulic cables or for cable
carriers with more than 4 meters length.

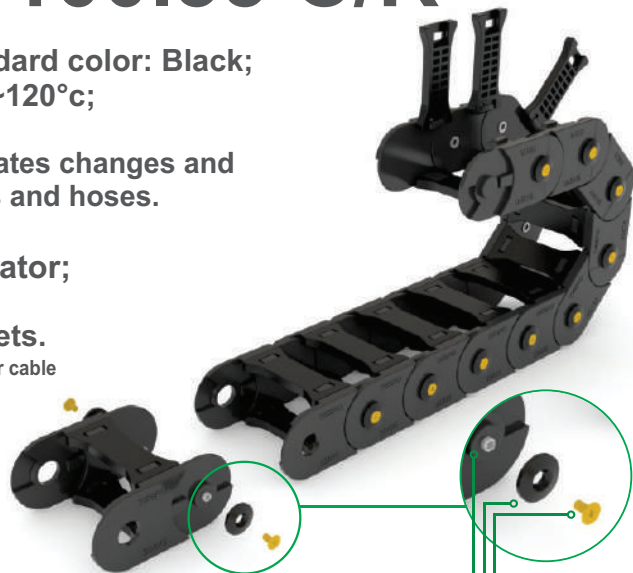


Technical Specifications

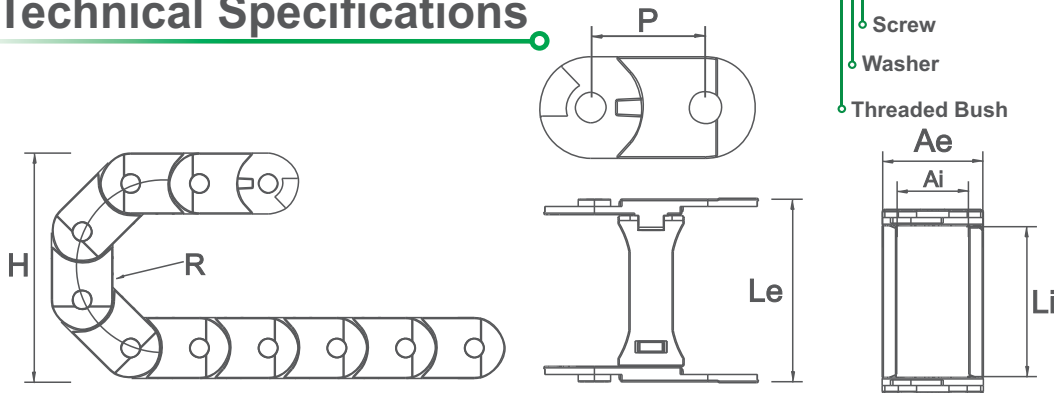


CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METRO	WEIGHT/ METRO
03641	CABLE CARRIER T100.35 R75mm With REINFORCEMENTS	100x35	126x50	185	75	56	18	1900gr
03775	CABLE CARRIER T100.35 R150mm With REINFORCEMENTS	100x35	126x50	335	150	56	18	1900gr

*Unit of measurement: millimeters

Cables Separator (Cód. 03558)



Example of separator
position inside of the link









* Recommended to add
1 separator every 3 links


Mounting Brackets

Each cable carrier needs one set of mounting brackets made by two
brackets. Each bracket should be fixed in each end of the cable carrier.

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03485	MOUNTING BRACKETS SET T100.35	100x35	124x50



For fixing the mounting brackets, you
can add holes in the highlighted area.



Assembly Plan

Step 1




Step 2



Step 3



Final Assembly

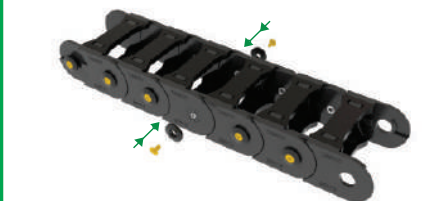

*Optional wrench is available to
help during assembly process
(Cód.03684)



Cable Carrier T125.35 C/R

Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;


Opening system that facilitates changes and
maintenances of the cables and hoses.

Model with cables separator;

Model with reinforcing rivets.

*Recommended for hydraulic cables or for cable
carriers with more than 4 meters length.


Technical Specifications

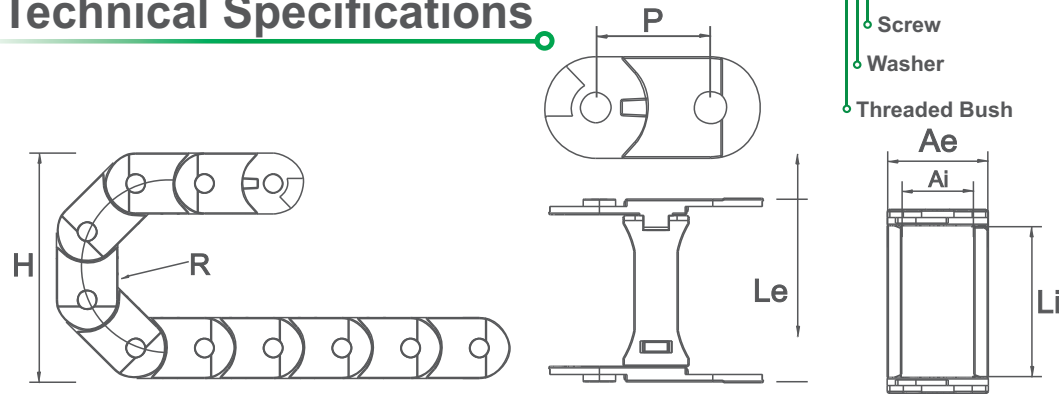

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METRO	WEIGHT/ METRO
03688	CABLE CARRIER T125.35 R75mm With REINFORCEMENTS	125x35	152x50	185	75	56	18	2040gr
03777	CABLE CARRIER T125.35 R150mm With REINFORCEMENTS	125x35	152x50	335	150	56	18	2040gr

*Unit of measurement: millimeters

Cables Separator (Cód. 03691)

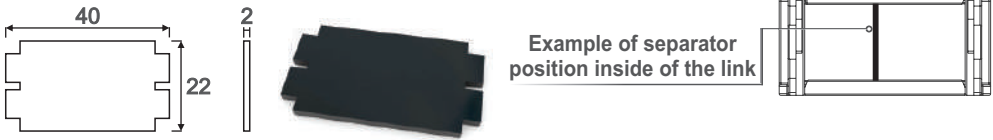


* Recommended to add
1 separator every 3 links


Mounting Brackets

Each cable carrier needs one set of mounting brackets made by two
brackets. Each bracket should be fixed in each end of the cable carrier.

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03689	MOUNTING BRACKETS SET T125.35	125x35	150x50

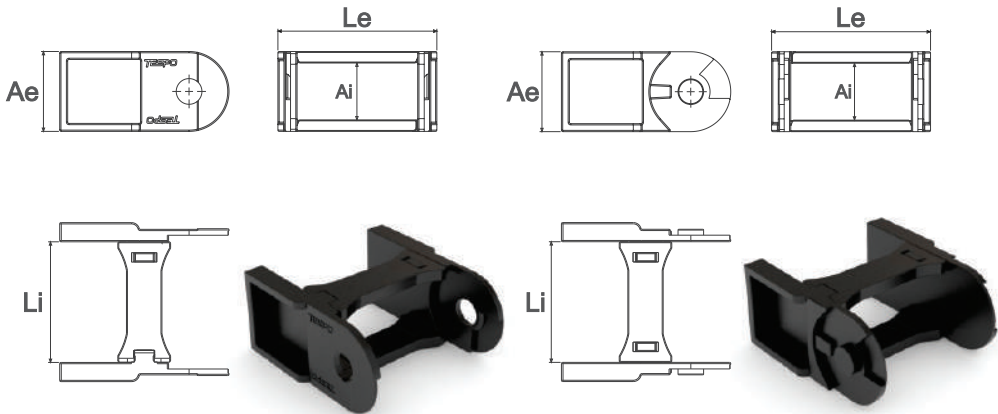


For fixing the mounting brackets, you
can add holes in the highlighted area.



Assembly Plan

Step 1

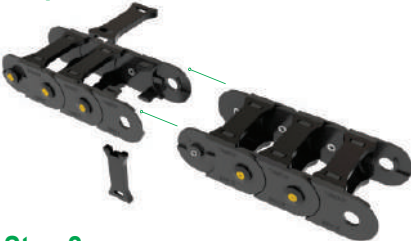


Step 2




Step 3



Final Assembly

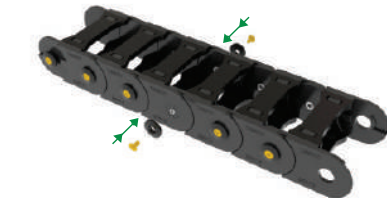

*Optional wrench is available to
help during assembly process
(Cód.03684)



Cable Carrier F.T50.35


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°C;

Opening system that facilitates changes and
maintenances of the cables and hoses.

Totally closed cable carrier for
protection against chips, wastes,
dust, sand and others.



Technical Specifications

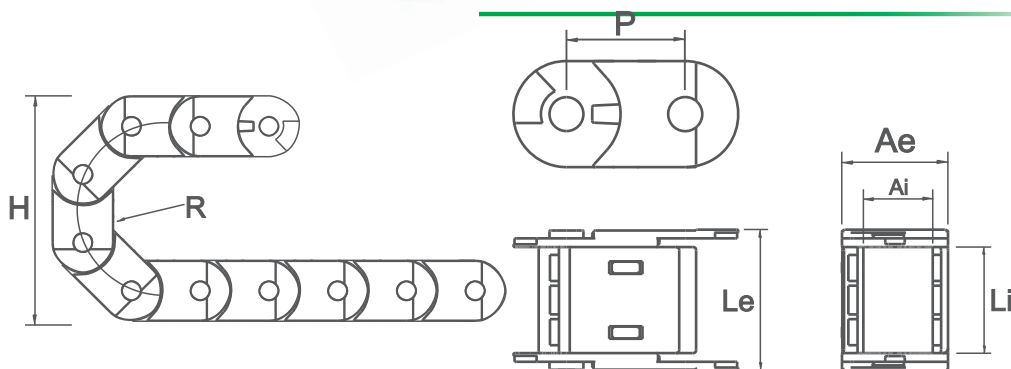


CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METRO	WEIGHT/ METRO
03653	CABLE CARRIER F.T50.35 R75mm	50x35	66x50	185	75	56	18	1650gr
03778	CABLE CARRIER F.T50.35 R150mm	50x35	66x50	335	150	56	18	1650gr

*Unit of measurement: millimeters


Mounting Brackets

Each cable carrier needs one set of mounting brackets made by two
brackets. Each bracket should be fixed in each end of the cable carrier.


CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03657	MOUNTING BRACKETS SET T50.35	50x35	74x50

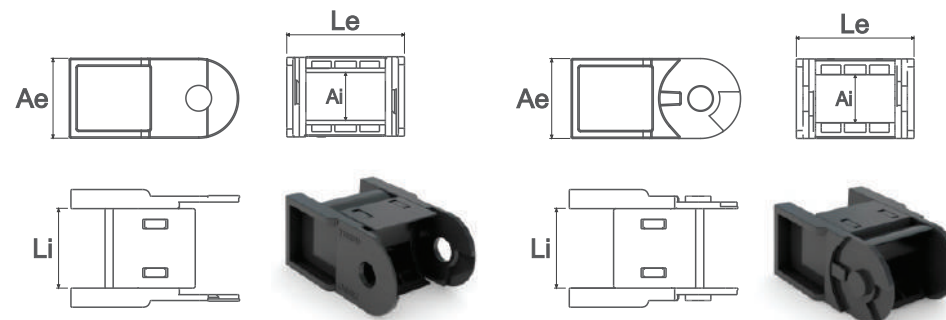

For fixing the mounting brackets, you
can add holes in the highlighted area.



Assembly Plan

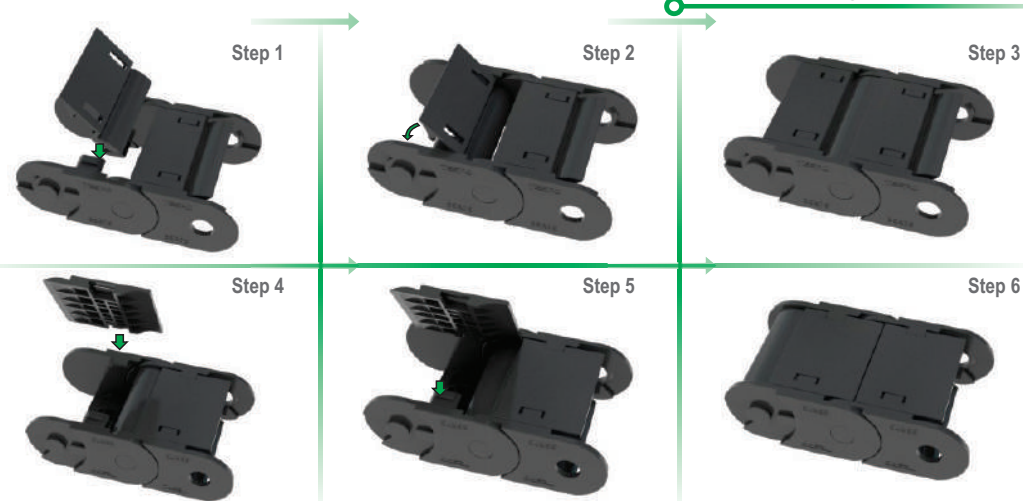

Cable Carrier F.T75.35


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°C;

Opening system that facilitates changes and
maintenances of the cables and hoses.

Totally closed cable carrier for
protection against chips, wastes,
dust, sand and others.



Technical Specifications

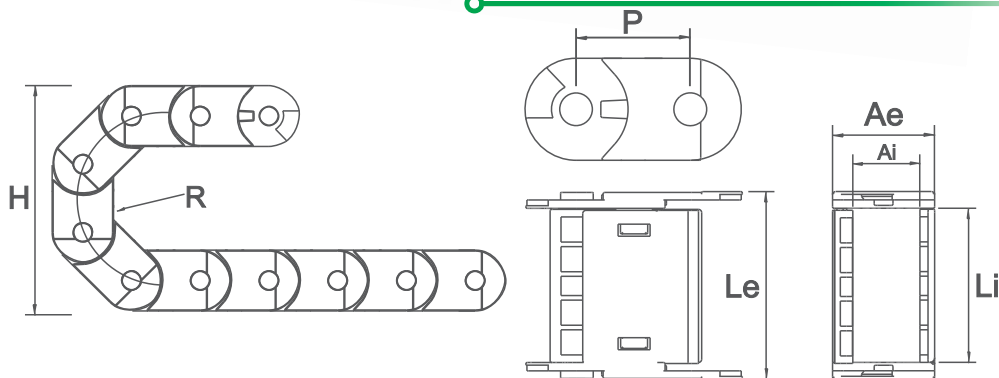


CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METRO	WEIGHT/ METRO
03654	CABLE CARRIER F.T75.35 R75mm	75x35	91x50	185	75	56	18	2040gr
03779	CABLE CARRIER F.T75.35 R150mm	75x35	91x50	335	150	56	18	2040gr

*Unit of measurement: millimeters


Mounting Brackets

Each cable carrier needs one set of mounting brackets made by two
brackets. Each bracket should be fixed in each end of the cable carrier.


CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03658	MOUNTING BRACKETS SET T75.35	75x35	99x50

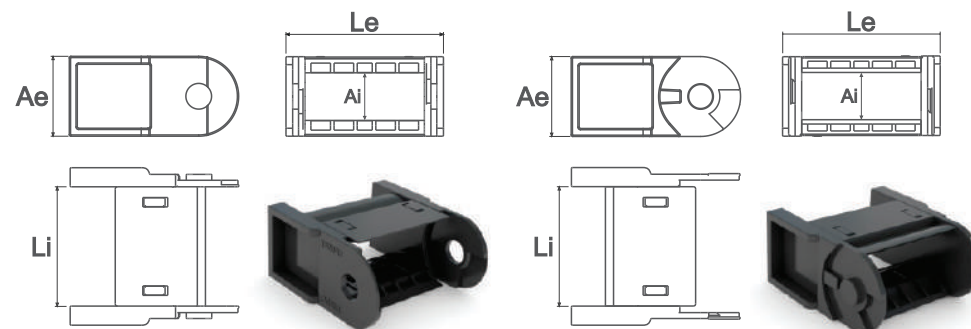

For fixing the mounting brackets, you
can add holes in the highlighted area.



Assembly Plan

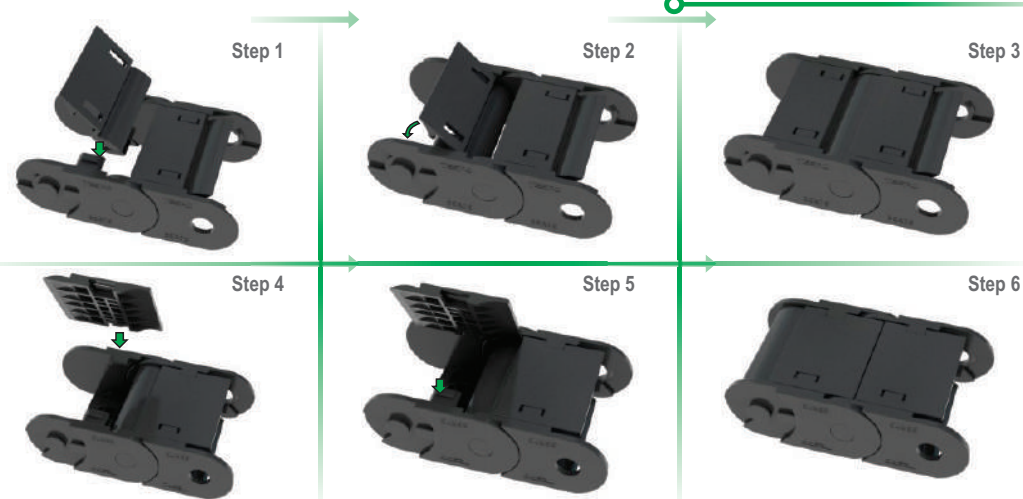


Cable Carrier T50.50


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;

Opening system that facilitates changes and
maintenances of the cables and hoses.

Model with cables separator;

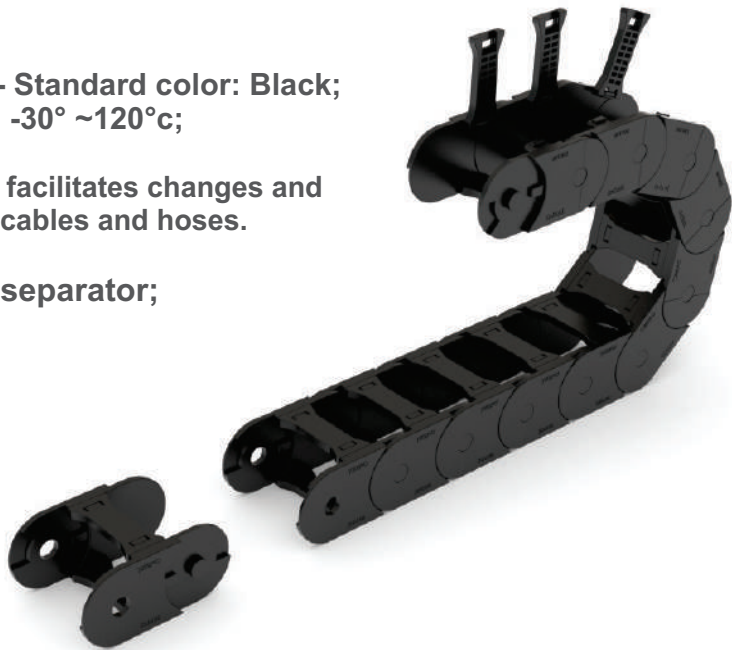


Technical Specifications

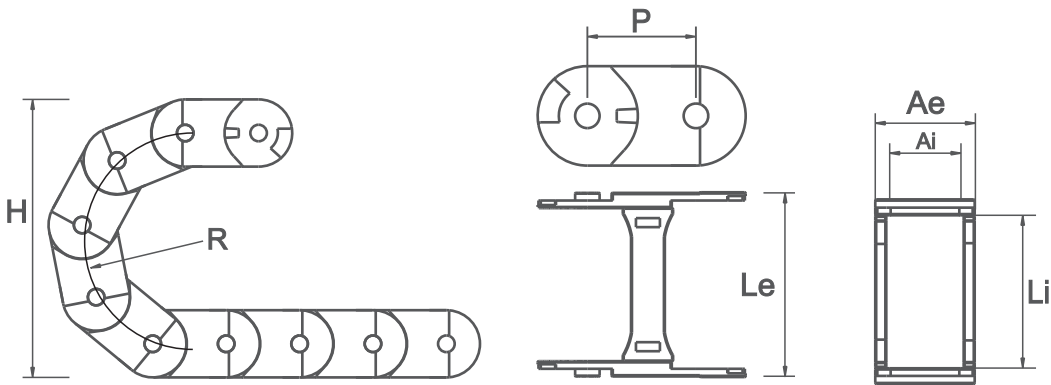

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METRO	WEIGHT/ METRO
03703	CABLE CARRIER T50.50.R100mm	50X50	72X65	270	100	71	14	1780gr
03704	CABLE CARRIER T50.50.R150mm	50X50	72X65	370	150	71	14	1780gr


Mounting bracket

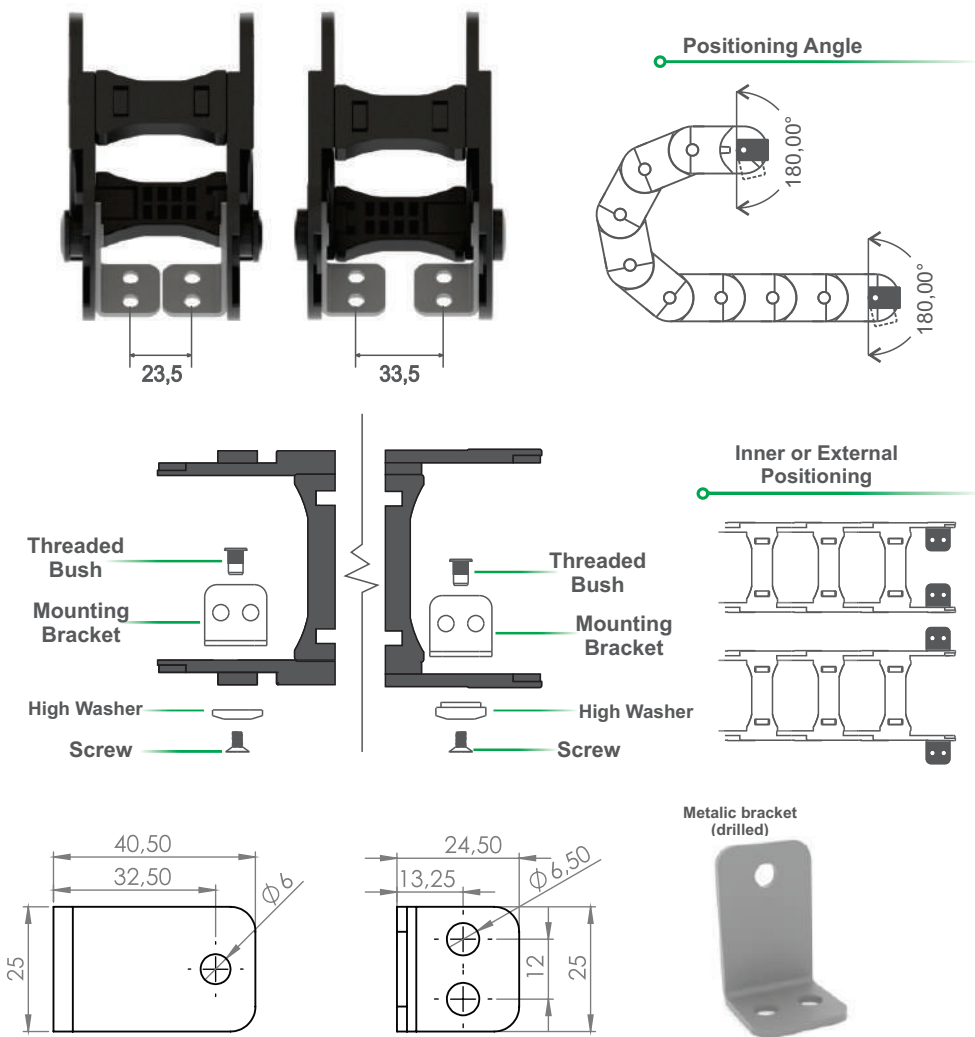

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03702	MOUNTING BRACKET SET	50X50	79X65

*Unit of measurement: millimeters

Cables Separator (Cód. 03794)

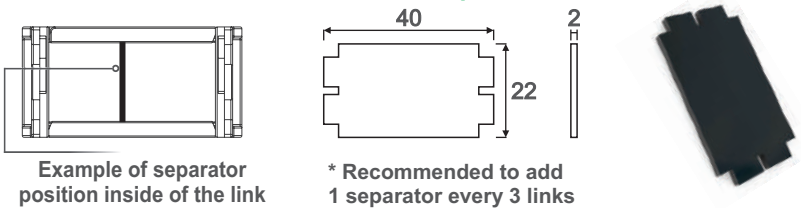

Assembly Plan

Step 1




Step 2



Step 3



Final Assembly

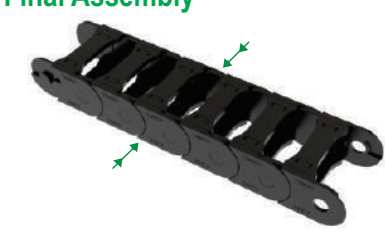

*Optional wrench is available to
help during assembly process
(Cód.03684)




Cable Carrier T75.50


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;

Opening system that facilitates changes and
maintenances of the cables and hoses.

Model with cables separator;

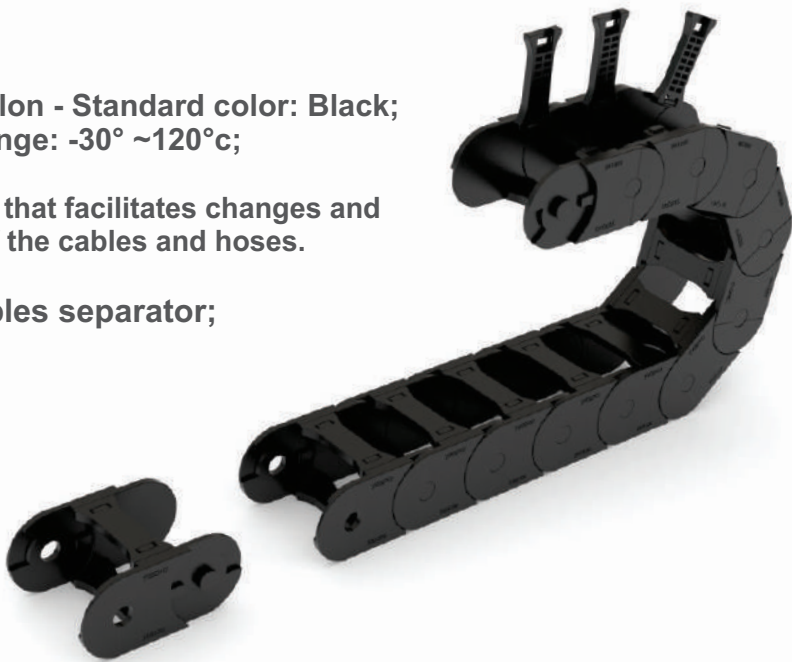


Technical Specifications

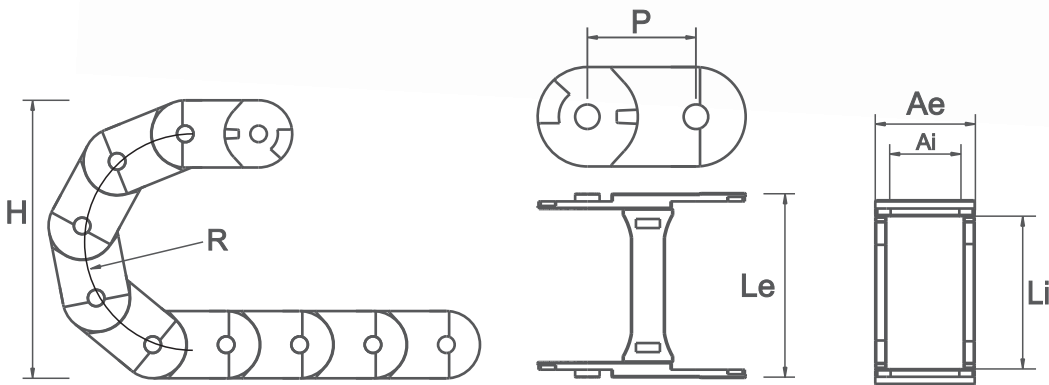

CODE	DESCRIPTION	INNER DIMENSION: (Li x Ai)	EXTERNAL DIMENSION (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METRO	WEIGHT/ METRO
03705	CABLE CARRIER T75.50.R100mm	75X50	97X65	270	100	71	14	1900gr
03706	CABLE CARRIER T75.50.R150mm	75X50	97X65	370	150	71	14	1900gr


Mounting bracket

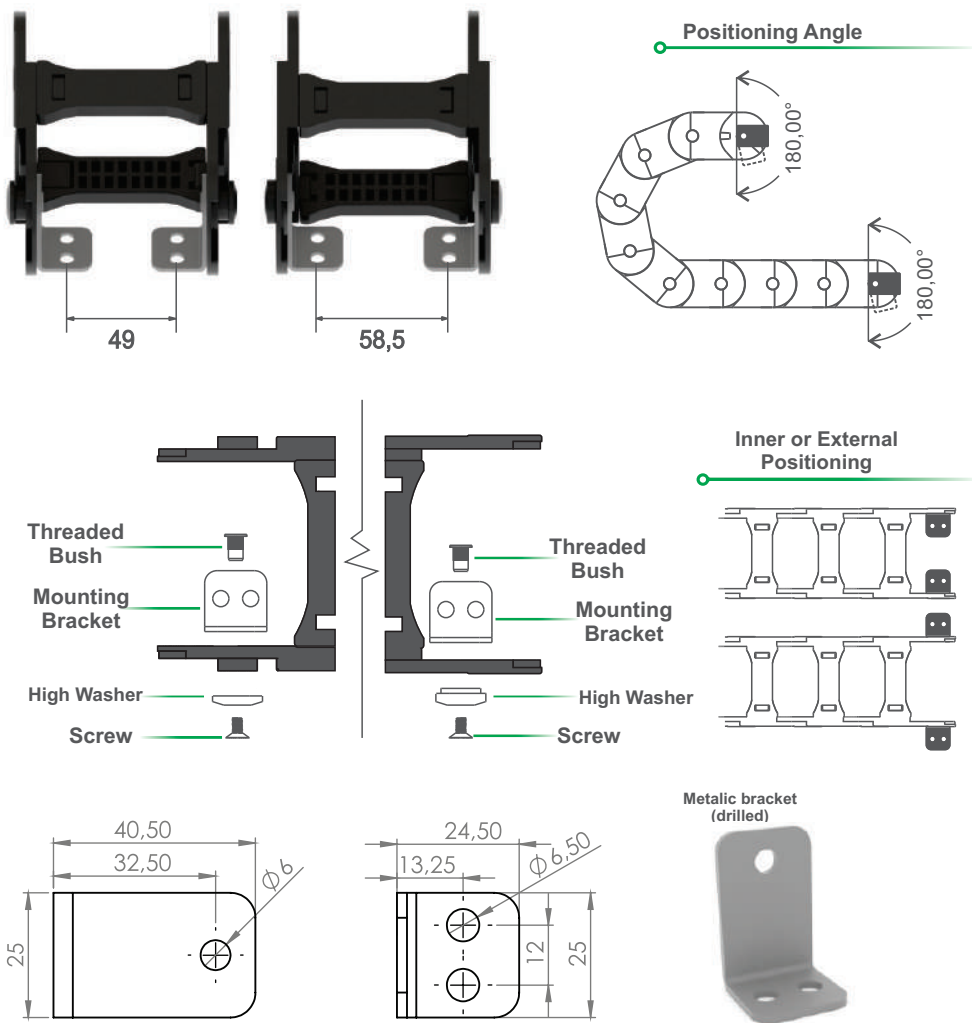

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03718	MOUNTING BRACKET SET	75X50	105X65

*Unit of measurement: millimeters

Cables Separator (Cód. 03794)

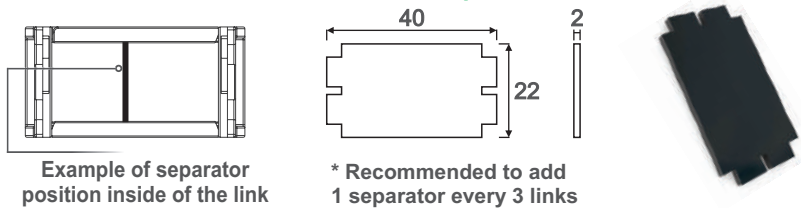


Assembly Plan

Step 1




Step 2

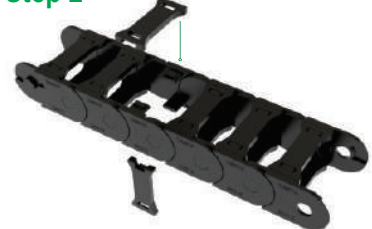

Step 3



Final Assembly

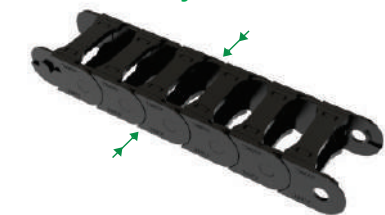

*Optional wrench is available to
help during assembly process
(Cód.03684)



Cable Carrier T100.50


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;

Opening system that facilitates changes and
maintenances of the cables and hoses.

Model with cables separator;




Technical Specifications

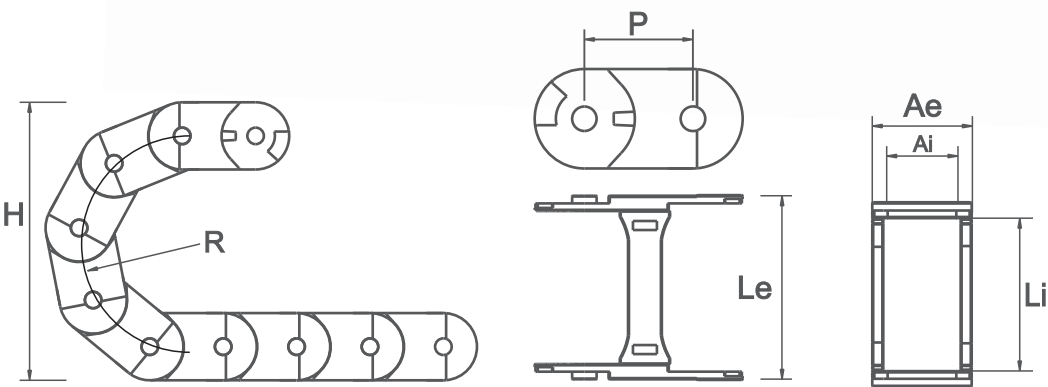

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METRO	WEIGHT/ METRO
03707	CABLE CARRIER T100.50.R100mm	100x50	122X65	270	100	71	14	2005gr
03708	CABLE CARRIER T100.50.R150mm	100x50	122X65	370	150	71	14	2005gr


Mounting bracket

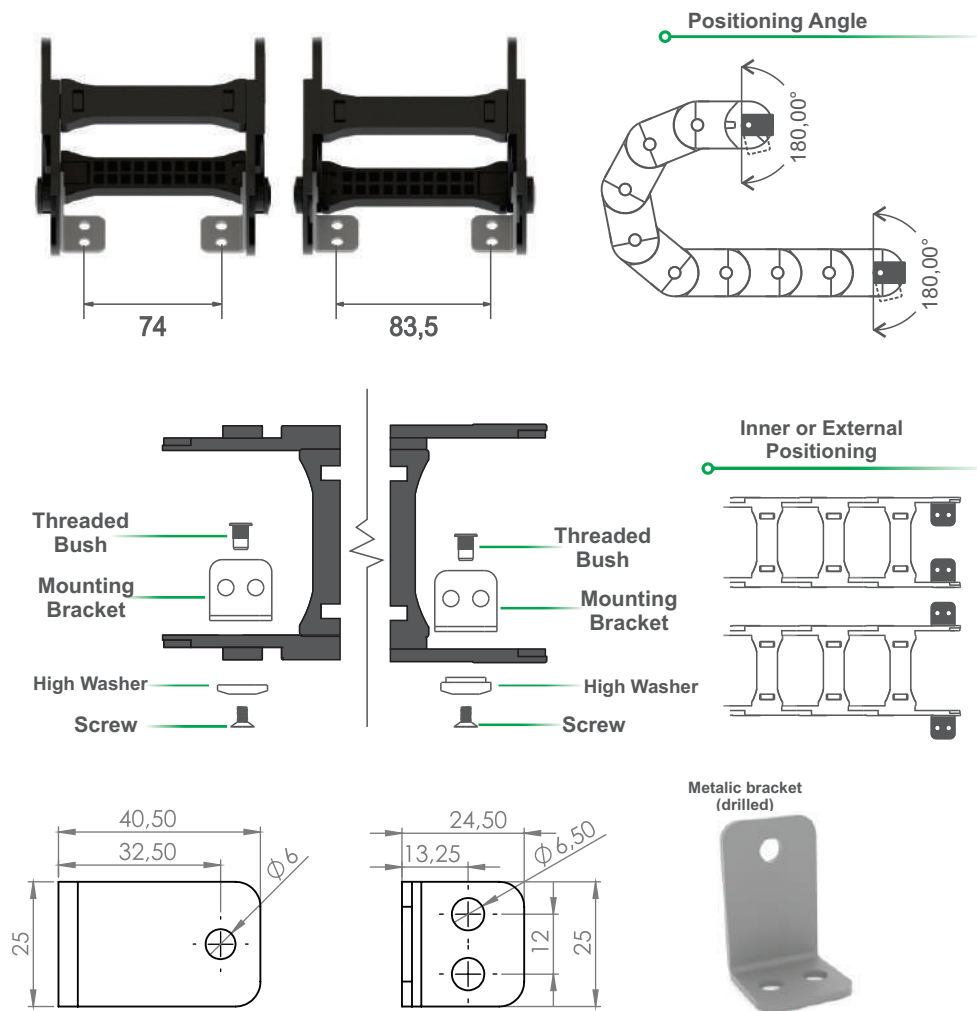



CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03719	MOUNTING BRACKET SET	100x50	129X65

*Unit of measurement: millimeters

Cables Separator (Cód. 03794)

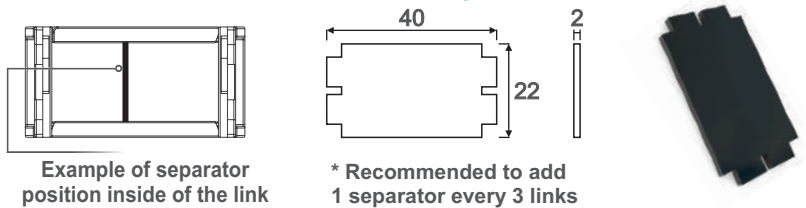

Assembly Plan

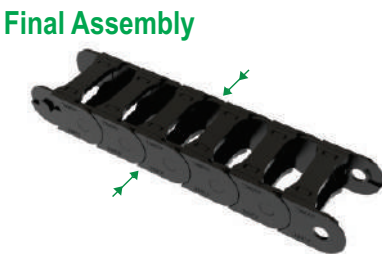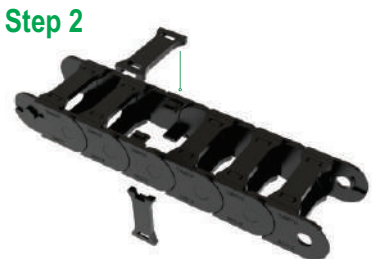

*Optional wrench is available to
help during assembly process
(Cód.03684)



Cable Carrier T125.50


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;

Opening system that facilitates changes and
maintenances of the cables and hoses.

Model with cables separator;




Technical Specifications

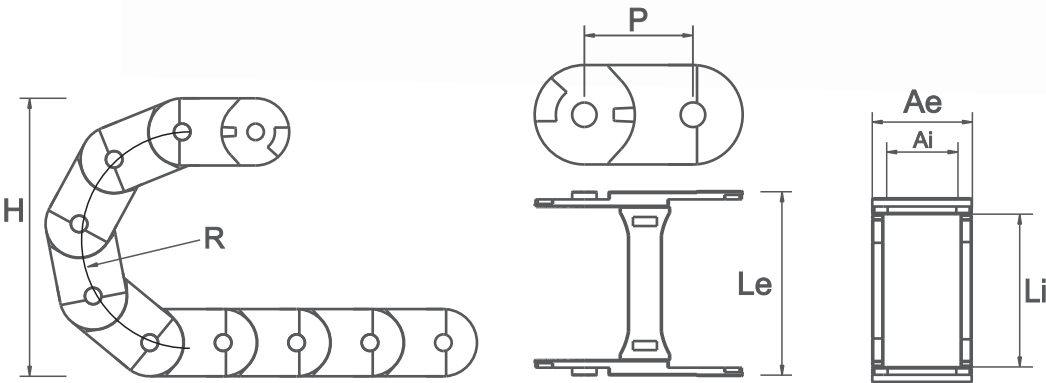

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METRO	WEIGHT/ METRO
03709	CABLE CARRIER T125.50.R100mm	125x50	147X65	270	100	71	14	2150gr
03710	CABLE CARRIER T125.50.R150mm	125x50	147X65	370	150	71	14	2150gr


Mounting bracket

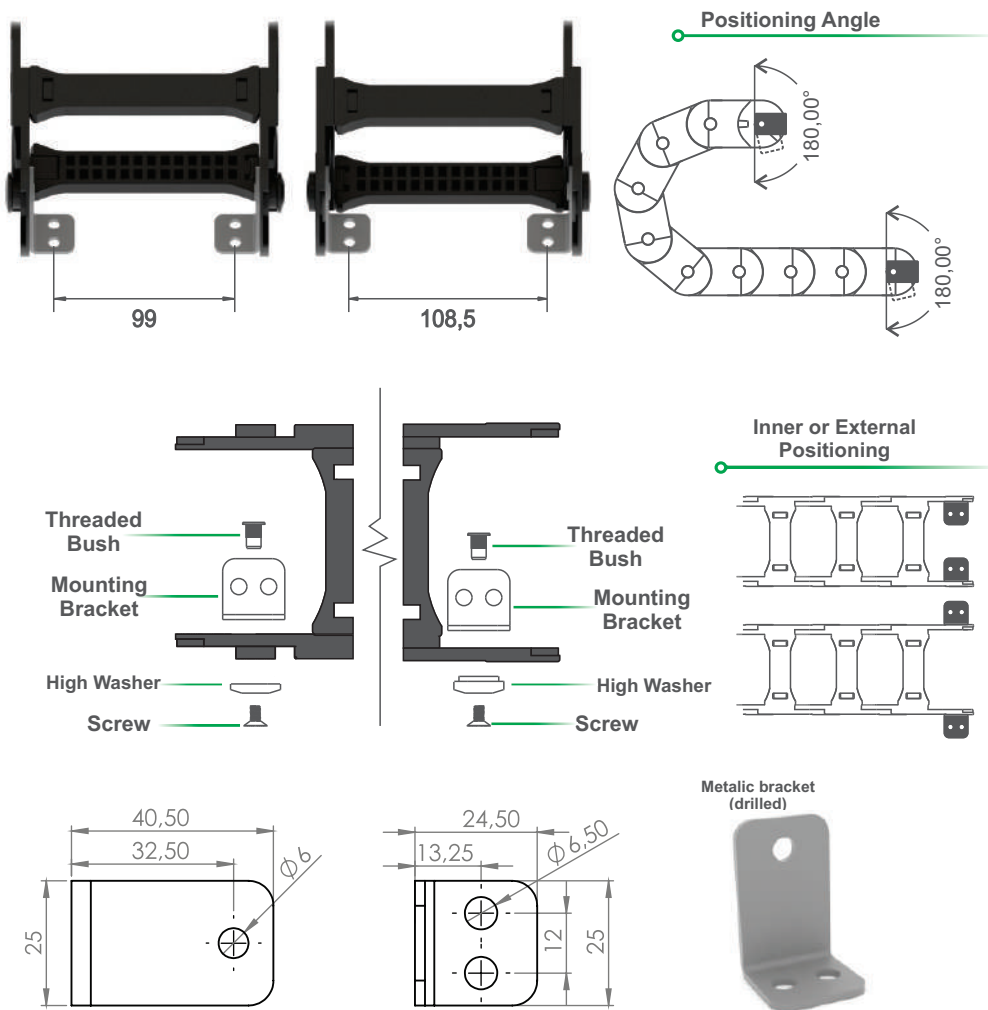

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03720	MOUNTING BRACKET SET	125x50	155X65

*Unit of measurement: millimeters

Cables Separator (Cód. 03795)

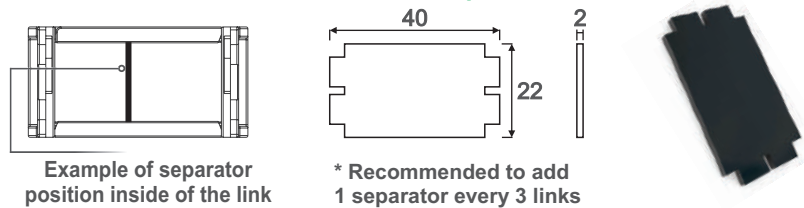


Assembly Plan

Step 1




Step 2

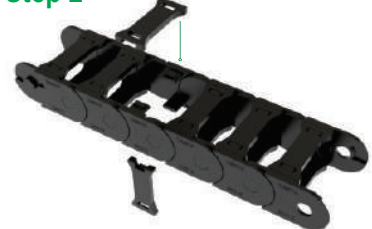

Step 3



Final Assembly

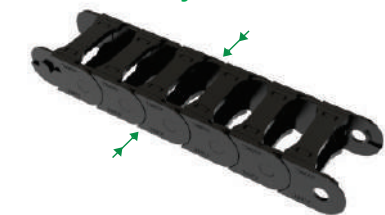

*Optional wrench is available to
help during assembly process
(Cód.03684)



Cable Carrier T50.50 C/R


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;

Opening system that facilitates changes and
maintenances of the cables and hoses.


Model with cables separator;

Model with reinforcing rivets.

*Recommended for hydraulic cables or for cable
carriers with more than 4 meters length.

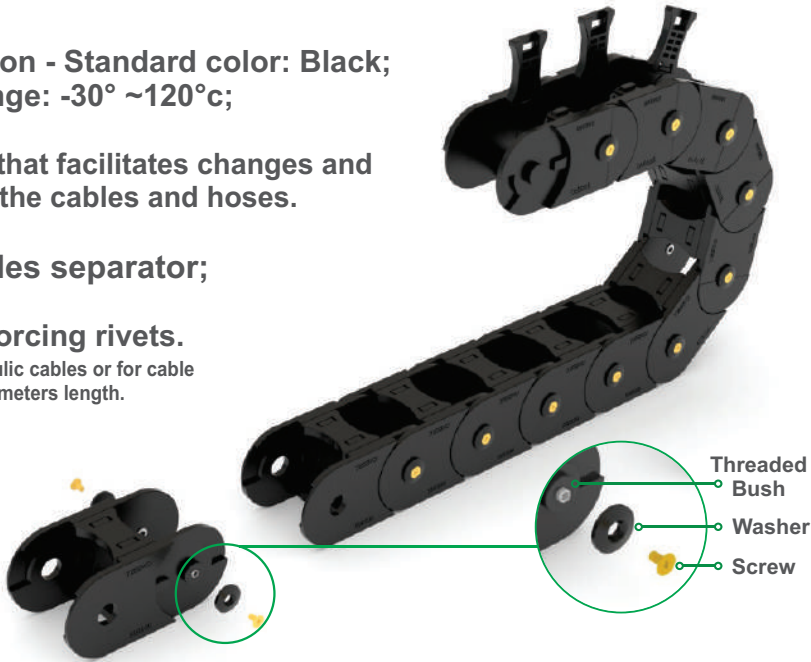


Technical Specifications

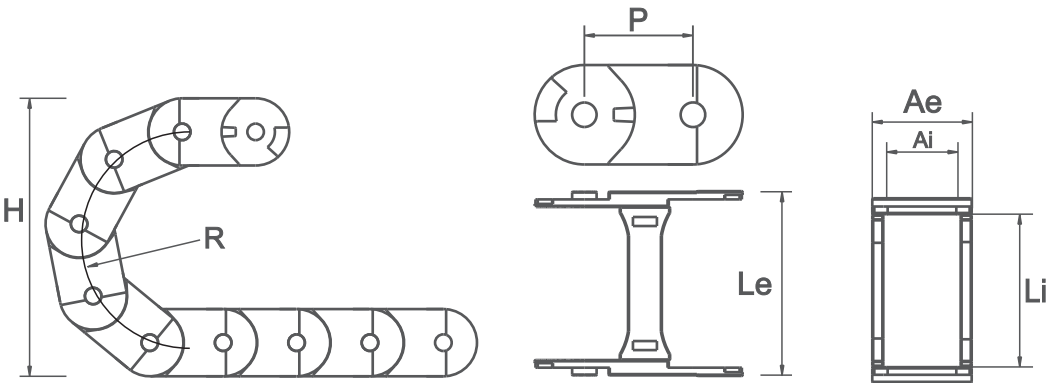

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METRO	WEIGHT/ METRO
03694	CABLE CARRIER T50.50.R100mm WITH REINFORCEMENTS	50X50	77X65	270	100	71	14	1970gr
03695	CABLE CARRIER T50.50.R150mm WITH REINFORCEMENTS	50X50	77X65	370	150	71	14	1970gr


Mounting bracket

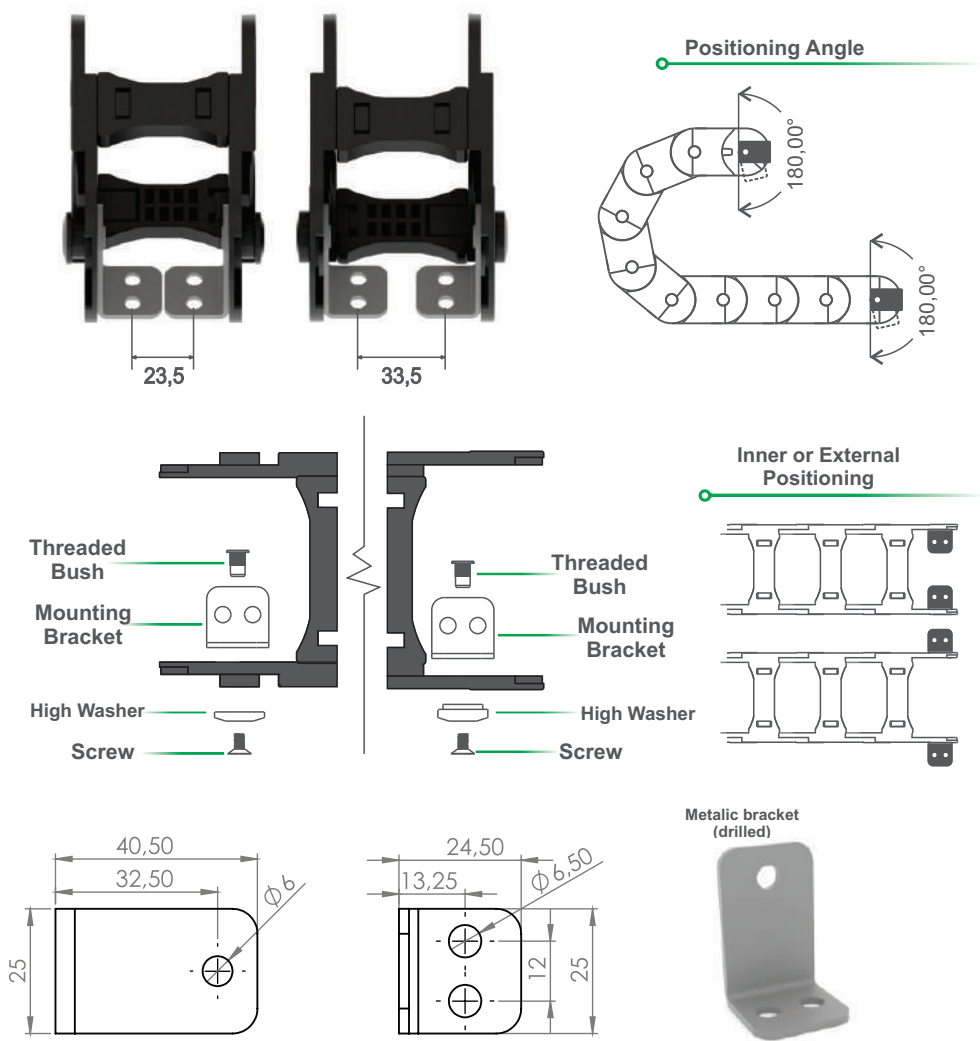

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03702	MOUNTING BRACKET SET	50X50	79X65


*Unit of measurement: millimeters

Cables Separator (Cód. 03794)

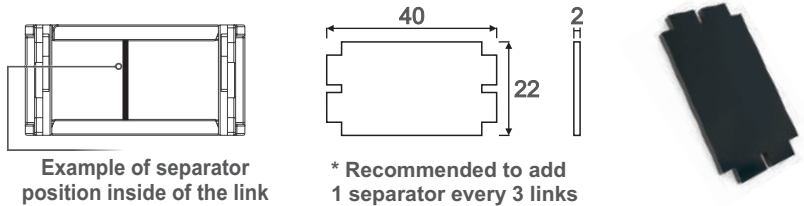

Assembly Plan

Step 1

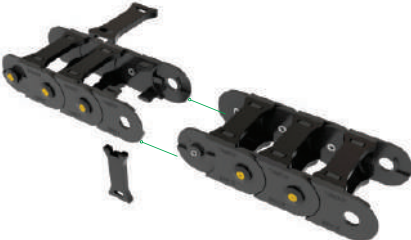


Step 2



Step 3



Final Assembly

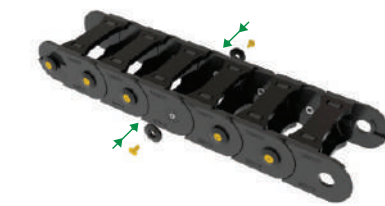

*Optional wrench is available to
help during assembly process
(Cód.03684)



Cable Carrier T75.50 C/R


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;

Opening system that facilitates changes and
maintenances of the cables and hoses.


Model with cables separator;

Model with reinforcing rivets.

*Recommended for hydraulic cables or for cable
carriers with more than 4 meters length.

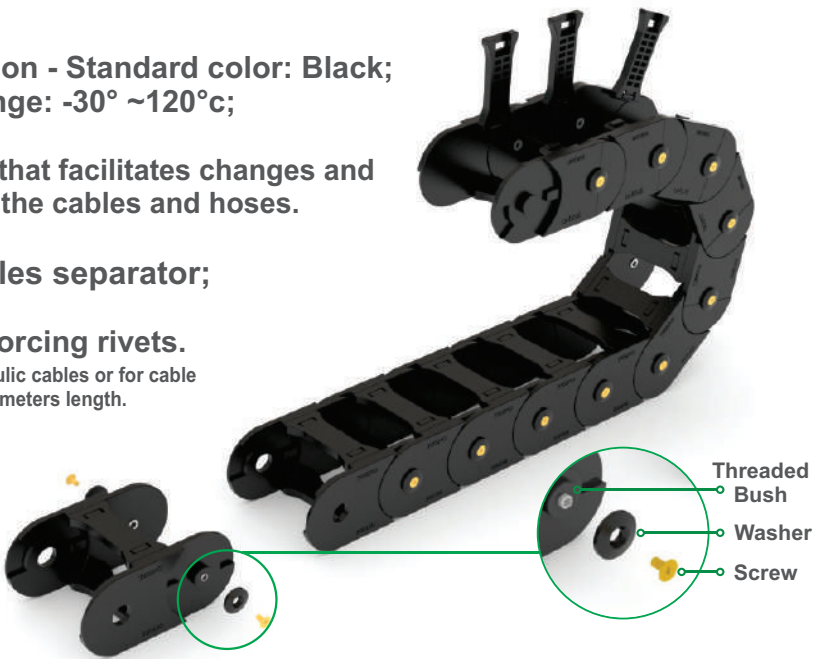


Technical Specifications

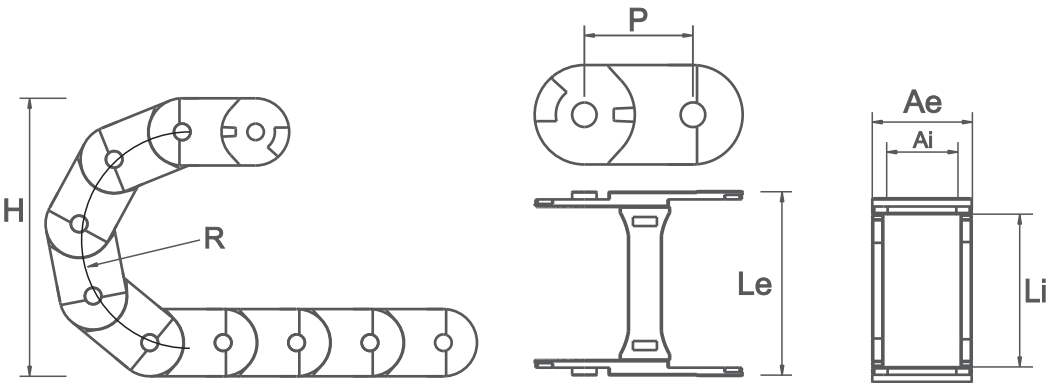

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METRO	WEIGHT/ METRO
03696	CABLE CARRIER T75.50.R100mm WITH REINFORCEMENTS	75X50	103X65	270	100	71	14	2090gr
03697	CABLE CARRIER T75.50.R150mm WITH REINFORCEMENTS	75X50	103X65	370	150	71	14	2090gr


Mounting bracket

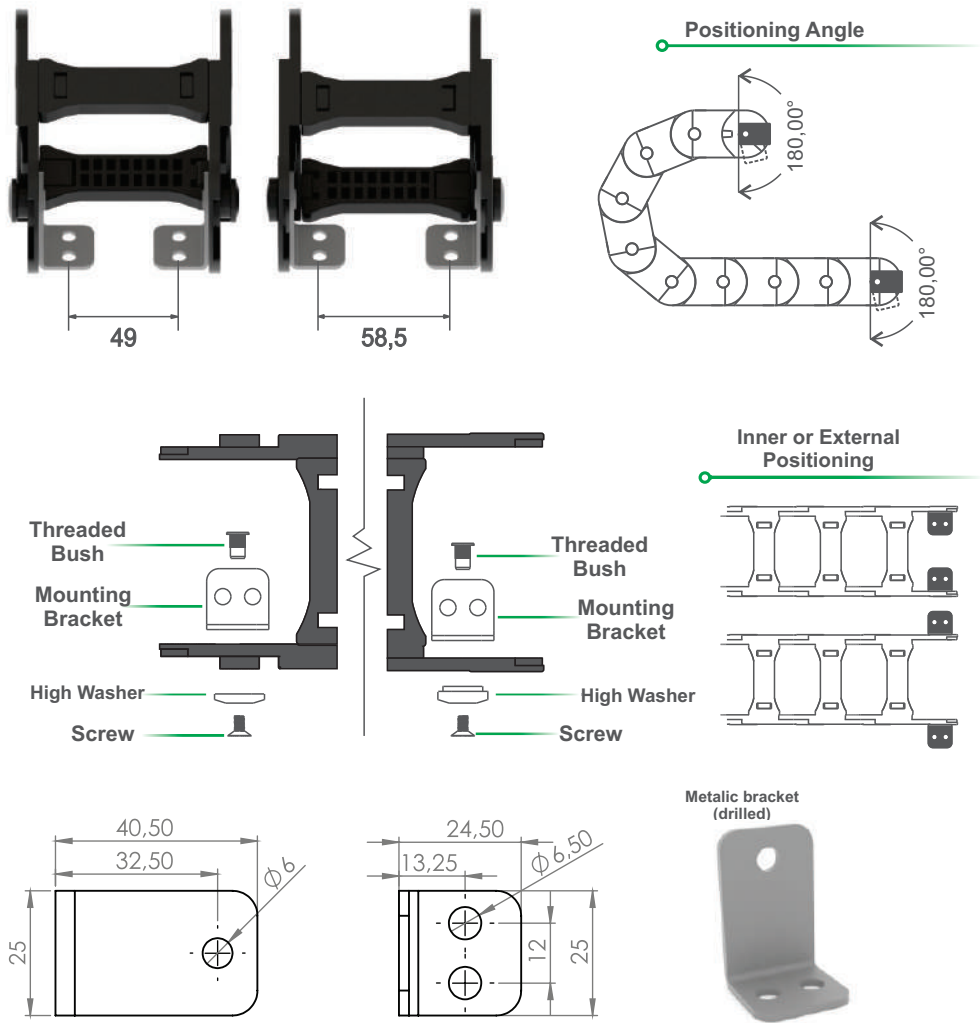

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03718	MOUNTING BRACKET SET	75X50	105X65


*Unit of measurement: millimeters

Cables Separator (Cód. 03794)

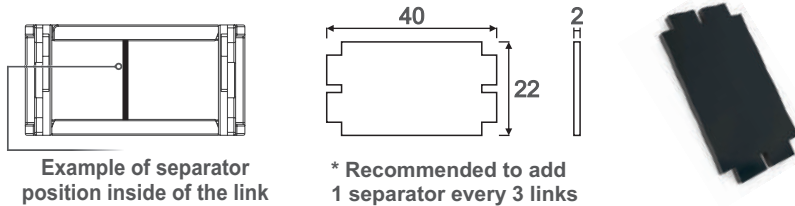

Assembly Plan

Step 1

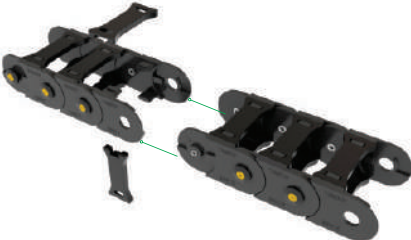


Step 2



Step 3



Final Assembly

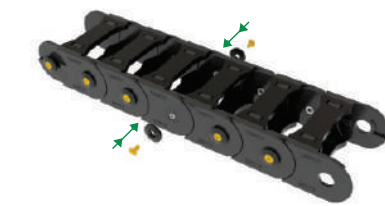

*Optional wrench is available to
help during assembly process
(Cód.03684)



Cable Carrier T100.50 C/R


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;

Opening system that facilitates changes and
maintenances of the cables and hoses.


Model with cables separator;

Model with reinforcing rivets.

*Recommended for hydraulic cables or for cable
carriers with more than 4 meters length.

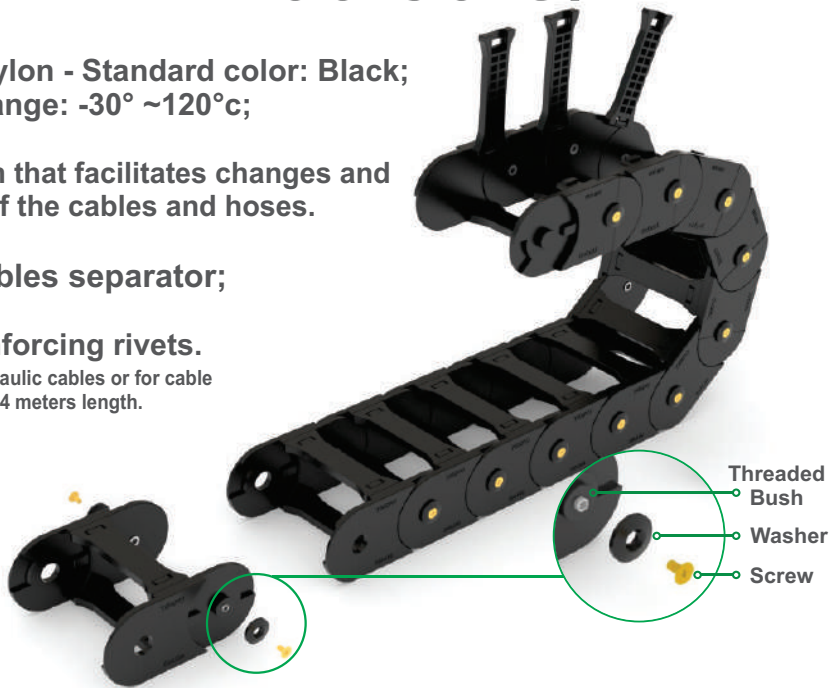


Technical Specifications

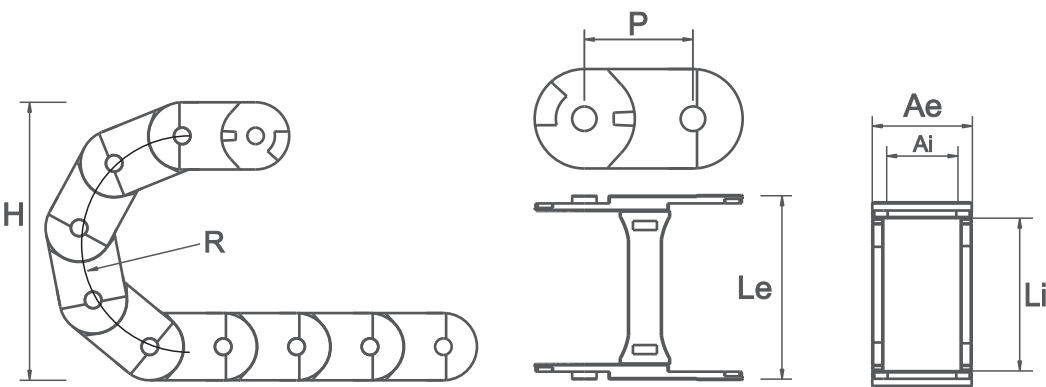

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METRO	WEIGHT/ METRO
03698	CABLE CARRIER T100.50.R100mm WITH REINFORCEMENTS	100x50	128X65	270	100	71	14	2195gr
03699	CABLE CARRIER T100.50.R150mm WITH REINFORCEMENTS	100x50	128X65	370	150	71	14	2195gr


Mounting bracket

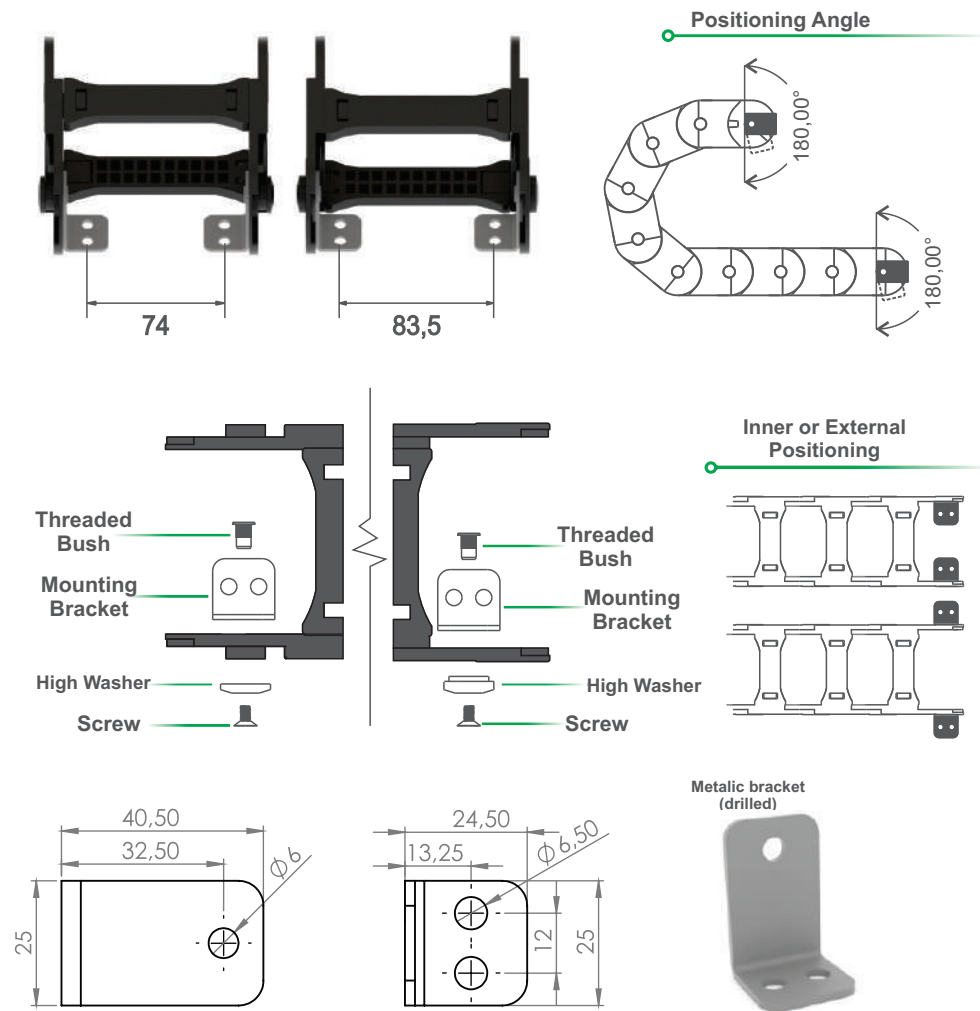

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03719	MOUNTING BRACKET SET	100x50	129X65


*Unit of measurement: millimeters

Cables Separator (Cód. 03794)

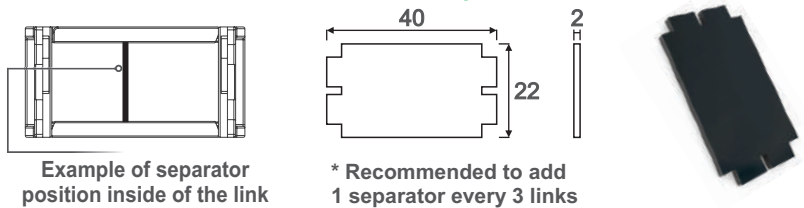

Assembly Plan

Step 1

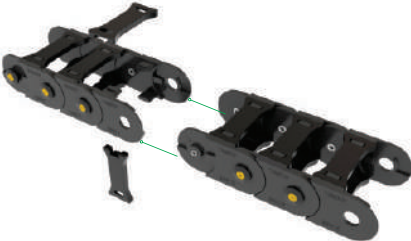

Step 2



Step 3



Final Assembly



*Optional wrench is available to
help during assembly process
(Cód.03684)



Cable Carrier T125.50 C/R


Produced in Nylon - Standard color: Black;
Temperature range: -30° ~120°c;

Opening system that facilitates changes and
maintenances of the cables and hoses.


Model with cables separator;

Model with reinforcing rivets.

*Recommended for hydraulic cables or for cable
carriers with more than 4 meters length.



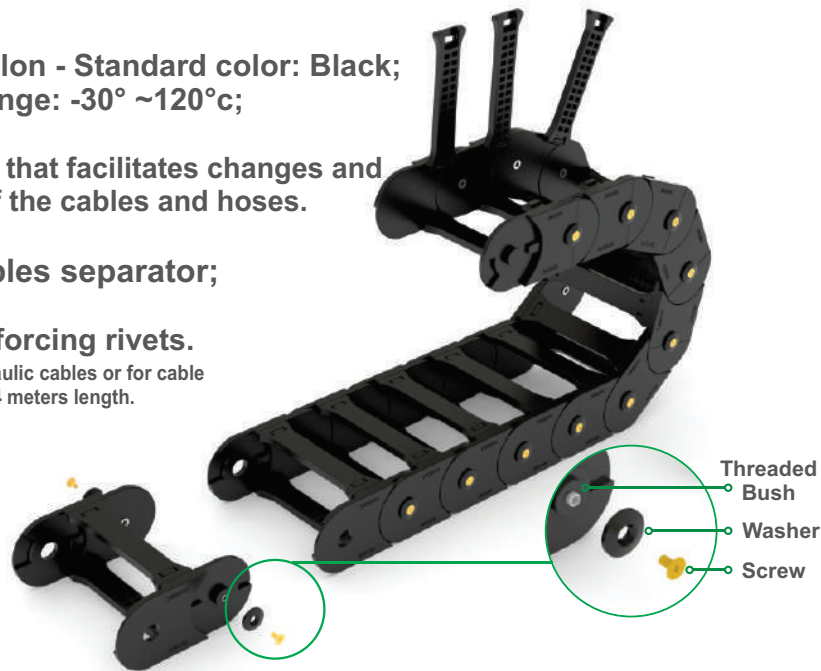


Technical Specifications

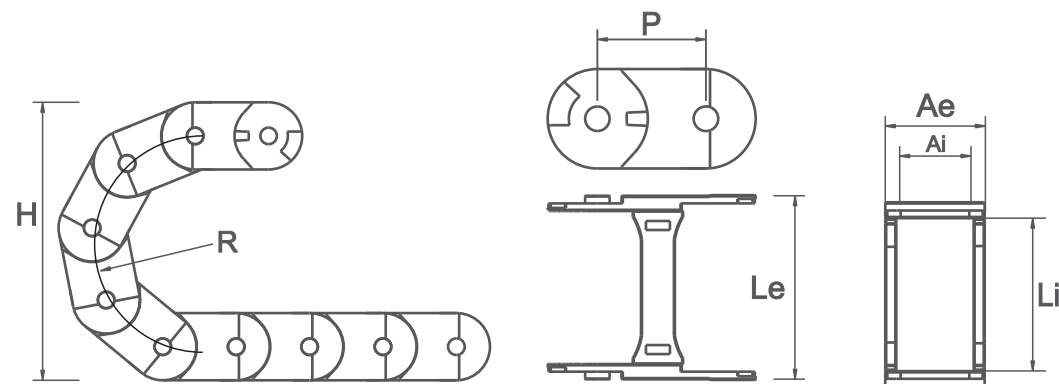

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)	HEIGHT (H)	RADIUS (R)	PITCH (P)	LINKS/ METRO	WEIGHT/ METRO
03700	CABLE CARRIER T125.50.R100mm WITH REINFORCEMENTS	125x50	153X65	270	100	71	14	2340gr
03701	CABLE CARRIER T125.50.R150mm WITH REINFORCEMENTS	125x50	153X65	370	150	71	14	2340gr


Mounting bracket

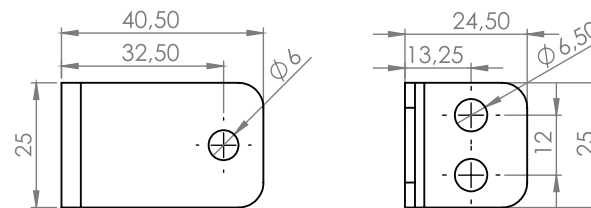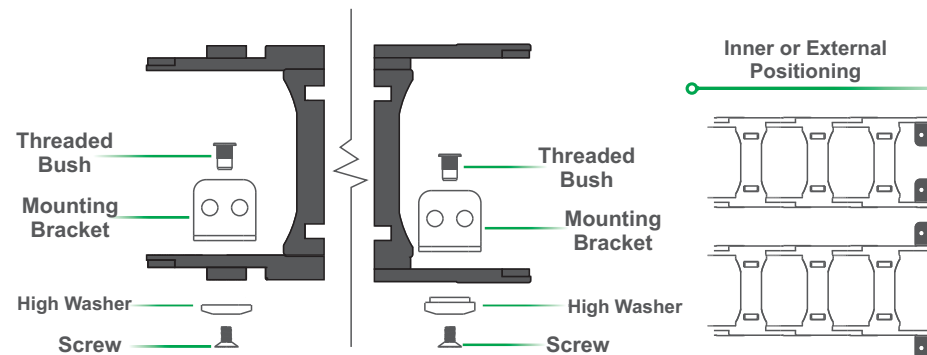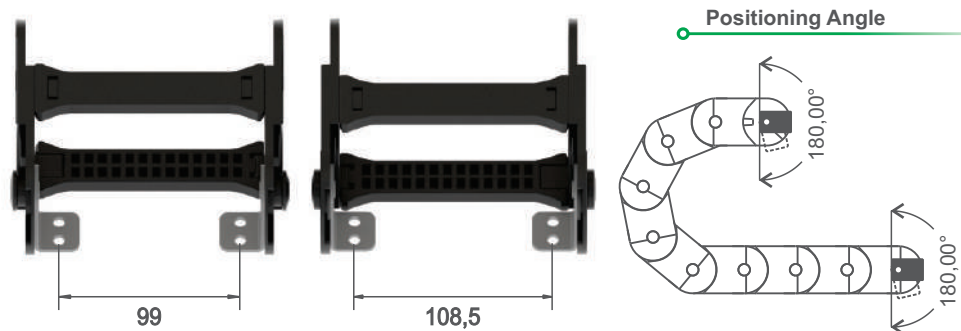

CODE	DESCRIPTION	INNER DIMENSIONS (Li x Ai)	EXTERNAL DIMENSIONS (Le x Ae)
03720	MOUNTING BRACKET SET	125x50	155X65


*Unit of measurement: millimeters

Cables Separator (Cód. 03795)

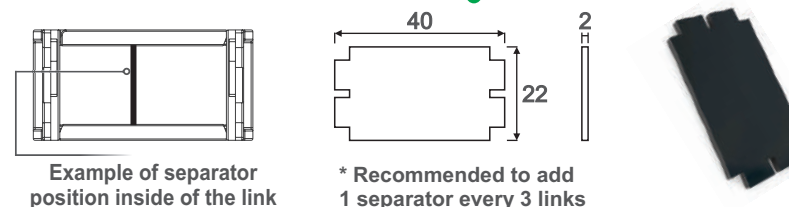

Assembly Plan

Step 1

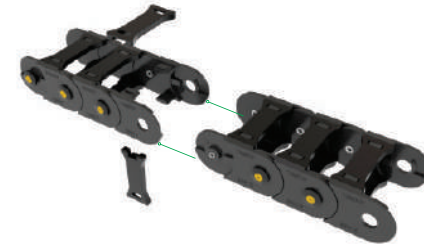


Step 2




Step 3



Final Assembly

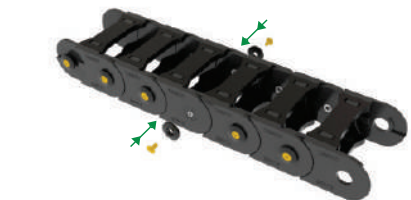

*Optional wrench is available to
help during assembly process
(Cód.03684)





MOLDMAKER | PLASTIC INJECTION

*TESPO reserves the right to make any changes in its products without previous warning. The pictures of the products and other details are merely illustrative. All the technical data may change according to the product.

781, Conde D'eu St. | Bela Vista District | Caxias do Sul | RS | Brazil



Phone/Fax +55 54 3222.6371 | 3222.6398



www.tespoinjetados.com.br |  export@tespoinjetados.com.br